

# CP

1 pole bi-directional DC and AC  
power contactors, disconnectors  
and changeover switches  
for power converters

# CP - 1 pole power contactors, disconnectors and changeover switches for DC and AC

With the CP series, Schaltbau is offering an innovative concept to the switchgear market. The arc-handling is done exclusively by permanent-magnetic blowout. This patented technology ensures fully bi-directional breaking capability and a more compact design. By reducing dimensions and weight we save you valuable space. In addition, the universal devices can be configured as a NO/NC contactor, disconnector or changeover switch. This enables us to react flexibly to chang-

ing customer requirements. The high switching functionality and reliability ensure practical and cost effective operation. The combination of innovative technology, compact design and high versatility makes the CP power contactors particularly suitable for use in railway and industrial applications. Thanks to its unique modular design, the new product family includes a variety of possible configurations catering to a wide range of applications.

## Features

- Innovative design**
  - Universally configurable as NO or NC contact, disconnect switch or changeover switch
  - DC bi-directional or AC up to 60 Hz max.
  - Effective arc handling - no critical current range and only reduced wear on the main contact system thanks to permanent magnetic blowout
  - High making capacity, also for disconnect switches and changeover switches
  - Monostable and bistable drives available; Bistable drives only require energy for the switching process - this reduces heat dissipation.
  - Modular, compact, low total cost of ownership (TCO)
- Main contact system**
  - 1 pole NC contact, NO contact, disconnector or changeover switch
  - Conventional thermal current: 600 A, 800 A, 1,000 A, 1,200 A, 1,500 A, or 2,000 A
  - Nominal voltage: 1,5 kV or 3 kV
  - Double-break contacts
- Easy maintenance**
  - Toolless inspection of main contact tips
  - Toolless replacement of the arc chamber

## Applications

- Main contactor, optional with pre-charging contactor and high-voltage discharging contact for:**
  - Traction converters
  - Inverters for auxiliary equipment
- Switchgear for various mobile and stationary applications:**
  - Rail: Locomotives and multiple-unit trains
  - Industry: Photovoltaic systems, wind turbines, cranes, welding systems, mining
- Contactor for:**
  - Activation of traction units
  - Activation of brake choppers for DC drives
  - Starter and compressor motors
  - PV systems
- Switchgear for the configuration of electrical system:**
  - Selection of one of several power supply sources
  - Configuration of filters for multi-system operation
  - Connecting/disconnecting DC links

## Reliable, robust and economical

Contactors of the CP series are designed for continuous currents from 600 amps to 2,000 amps. Among other features, the robust switchgear has a high making and breaking capacity and a high short-time withstand current. This ensures long operational reliability.

Depending on the application, there are different requirements for electromechanical components. The DC and AC contactors are very robust and by that able to withstand most shock and vibration requirements, IEC 60077-2 is met anyway.

## Configuration - A product tailored to your needs

Maximum modularity - whether as a contactor, disconnect switch or changeover switch: The CP series offers countless variation options and is the perfect fit for your application. A scalable power interface in combination with different extinguishing chambers

according to the switching requirements make the switchgear universally applicable. In addition to various auxiliary switch groups, a high-voltage discharge contact and/or a precharging contactor can also be integrated.

### Configure your preferred device:

Rd. operating current  $I_e/I_r$  up to 600 A 800 A 1,000 A 1,200 A 1,500 A 2,000 A

Nominal voltage up to  
 $U_n$  3,000 V  
 $U_n$  1,500 V

#### Contactor


1x NO	CP1115/...	•	06	08	10	12	15	20
1x NO	CP1130/...	•	06	08	10	12	15	20
1x NC	CP2115/...	•	06	08		12		20
1x NC	CP2130/...	•	06	08		12		20

#### Disconnect switch

1x NO	CP1115/...	•	06	08	10	12	15	20
1x NO	CP1130/...	•	06	08	10	12	15	20
1x NC	CP2115/...	•	06	08		12		20
1x NC	CP2130/...	•	06	08		12		20

#### Changeover switch

1x CO	CP3115/...	•	06			12		
1x CO	CP3130/...	•	06			12		

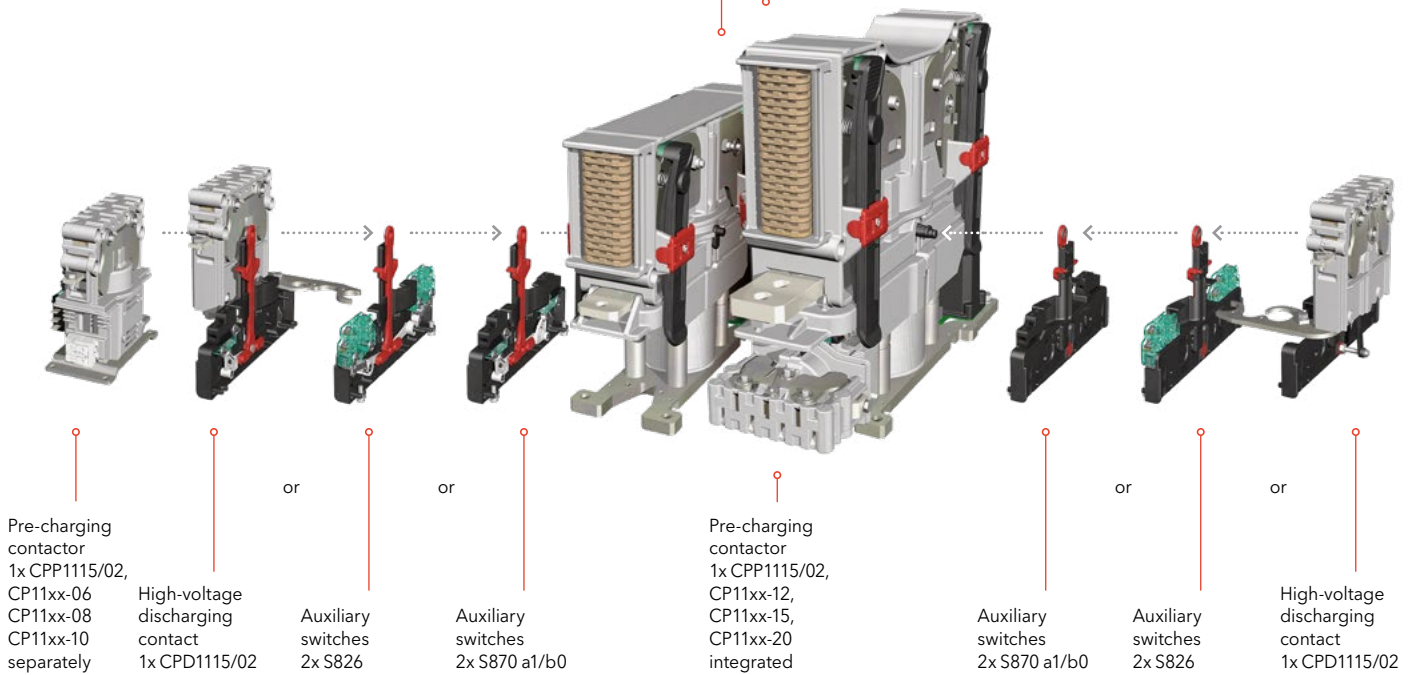

### Find your ideal switching device and configure it as a NO or NC contactor, as a disconnect switch or changeover switch.

Configuration main contacts					Configuration arc chamber, breaking capacity		
Switch	NO NC	3,000 V 1,500 V	600 A, 800 A 1,000 A, 1,200 A 1,500 A, 2,000 A	monostable bistable	NO contactor NC contactor	Highly efficient ceramic arc chamber for $U_n$ up to 3,000 V Highly efficient ceramic arc chamber for $U_n$ up to 1,500 V	✓
Disconnect	NO NC	3,000 V 1,500 V	600 A, 800 A 1,000 A, 1,200 A 1,500 A, 2,000 A	monostable bistable	Disconnecter	Cover cap main contact system, only for load-free switching	✓
Changeover	CO	3,000 V 1,500 V	600 A 1,200 A	monostable bistable	Changeover switch	Cover cap main contact system, only for load-free switching	✓

## Breaking capacity, arc handling

Controlling switching arcs is a particular challenge, especially when switching high DC loads: At the switching moment, i.e. when the contacts of the main circuit open under load, the load current continues to flow. Arcs are generated at extremely high temperatures, making it necessary to extinguish them within a few milliseconds. CP contactors realise an innovative, patented, highly effective and maintenance-free concept. It guarantees maximum switching reliability, combined with optimum perfor-

mance in terms of electrical life, switching behaviour and welding reliability of the contacts as well as the exclusion of so-called critical currents. The arc quenching of the CP high-power arc chambers are based exclusively on permanent magnetic arc extinguishing. The disadvantages of electromagnetic arc extinguishing, which is currently widely used in power contactors, are eliminated.

Series	Nominal voltage	Contact system	Thermal current Series Breaking capacity	600 A ...06	800 A ...08	1,000 A ...10	1,200 A ...12	1,500 A ...15	2,000 A ...20
CP1130-... CP1115-...	3,000 V 1,500 V	NO NO Disconnecter	high, up to 3,000 V high, up to 1,500 V load-free	●	●	●	●	●	●
CP2130-... CP2115-...	3,000 V 1,500 V	NC NC Disconnecter	high, up to 3,000 V high, up to 1,500 V load-free	●	●	●	●	●	●
CP3130-... CP3115-...	3,000 V 1,500 V	Changeover switch, Disconnecter	load-free	●			●		

Arc chamber			
Breaking capacity	<b>high, up to 3,000 V</b>	<b>high, up to 1,500 V</b>	<b>load-free</b>
Contact system	NO, NC	NO, NC	Changeover switch, disconnector
Description	High-efficiency ceramic arc chamber Frequent switching of high loads, for rated voltages up to 3,000 V	High-efficiency ceramic arc chamber Frequent switching of high loads, for rated voltages up to 1,500 V	Cover cap main contact system Only for load-free switching for rated voltages up to 3,000 V

\* Illustration of changeover switch: disconnector without top contacts

## Standards

### IEC 60077-2

Railway applications - Electric equipment for rolling stock - Part 2: Electrotechnical components; General rules

### IEC 62497-1

Railway applications - Insulation coordination - Part 1: Basic requirements - Clearances and creepage distances for all electrical and electronic equipment

### IEC 62236-3-2

Railway applications - Electromagnetic compatibility - Part 3-2: Rolling stock - Apparatus

### IEC 61373

Railway applications - Rolling stock equipment - Shock and vibration tests

# Ordering key

## CP1130-20-A-CM-020

### Series, contact configuration

- CP11** AC- and bi-directional DC NO contactor, 1 pole or disconnect switch, 1 pole
- CP21** AC- and bi-directional DC NC contactor, 1 pole or disconnect switch, 1 pole
- CP31** AC- and bi-directional DC CO contactor, 1 pole  
For load-free switching only

### Nominal voltage

- 15**  $U_n = 1,500\text{ V}$
- 30**  $U_n = 3,000\text{ V}$

### Conv. thermal current \*1

- 06**  $I_{th} = 600\text{ A}$ : CP11... / CP21... / CP31...
- 08**  $I_{th} = 800\text{ A}$ : CP11...
- 10**  $I_{th} = 1,000\text{ A}$ : CP11...
- 12**  $I_{th} = 1,200\text{ A}$ : CP11... / CP21... / CP31...
- 15**  $I_{th} = 1,500\text{ A}$ : CP11...
- 20**  $I_{th} = 2,000\text{ A}$ : CP11... / CP21...

### Arc chamber

- A** Highly efficient ceramic extinguishing chamber  
Frequent switching of high loads (CP11, CP21),  
for rated voltages up to 3,000 V
- B** Highly efficient ceramic extinguishing chamber  
Frequent switching of high loads (CP11, CP21),  
for rated voltages up to 1,500 V
- D** Cover cap main contact system (CP11, CP31)  
Only for load-free switching (disconnecter, changeover switch)  
For rated voltages up to 3,000 V

### Magnetic drive, Coil voltage

- A**  $U_s = 24\text{ V DC}$
- B**  $U_s = 36 \dots 48\text{ V DC}$
- C**  $U_s = 72 \dots 110\text{ V DC}$

### Coil design

- M** Monostable (Standard)
- N** Monostable with switching input for activation
- B** Bistable with 2 switching inputs for activation \*2

### Pre-charging contactor \*1

- CPP1115/02, 1 pole NO contactor, --- **0**
- Coil voltage:  $U_s = 24\text{ V DC}$  **1**
- $U_s = 36\text{ V DC}$  **2**
- $U_s = 48\text{ V DC}$  **3**
- $U_s = 60\text{ V DC}$  **4**
- $U_s = 72\text{ V DC}$  **5**
- $U_s = 84\text{ V DC}$  **6**
- $U_s = 96\text{ V DC}$  **7**
- $U_s = 110\text{ V DC}$  **8**

### Aux. switches, HV discharging contact: Mounting right

- **0**
- 2x Snap-action switches S826, SPDT-DB, silver contacts, M3 screw-type terminals **1**
- 2x Snap-action switches S826, SPDT-DB, gold contacts, M3 screw-type terminals **A**
- 2x Snap-action switches S870, SPDT, silver contacts, M3 screw-type terminals **2**
- Snap-action switches S870, SPDT, gold contacts, M3 screw-type terminals **B**
- 1x Snap-action switch S826, position front, SPDT-DB, silver contacts, M3 screw-type terminals **4**
- 1x Snap-action switch S826, position rear, SPDT-DB, silver contacts, M3 screw-type terminals **5**
- 1x CPD, High-voltage discharging contact **Z**


### Aux. switches, HV discharging contact: Mounting left

- **0**
- 2x Snap-action switches S826, SPDT-DB, silver contacts, M3 screw-type terminals **1**
- 2x Snap-action switches S826, SPDT-DB, gold contacts, M3 screw-type terminals **A**
- 2x Snap-action switches S870, SPDT, silver contacts, M3 screw-type terminals **2**
- Snap-action switches S870, SPDT, gold contacts, M3 screw-type terminals **B**
- 1x Snap-action switch S826, position front, SPDT-DB, silver contacts, M3 screw-type terminals **4**
- 1x Snap-action switch S826, position rear, SPDT-DB, silver contacts, M3 screw-type terminals **5**
- 1x CPD, High-voltage discharging contact **Z**

Auxiliary switches  
HV discharging contact  
**Mounting left**

CPP1115/02  
Pre-charging contactor  
**Mounting \*1**

Auxiliary switches  
HV discharging contact  
**Mounting right**

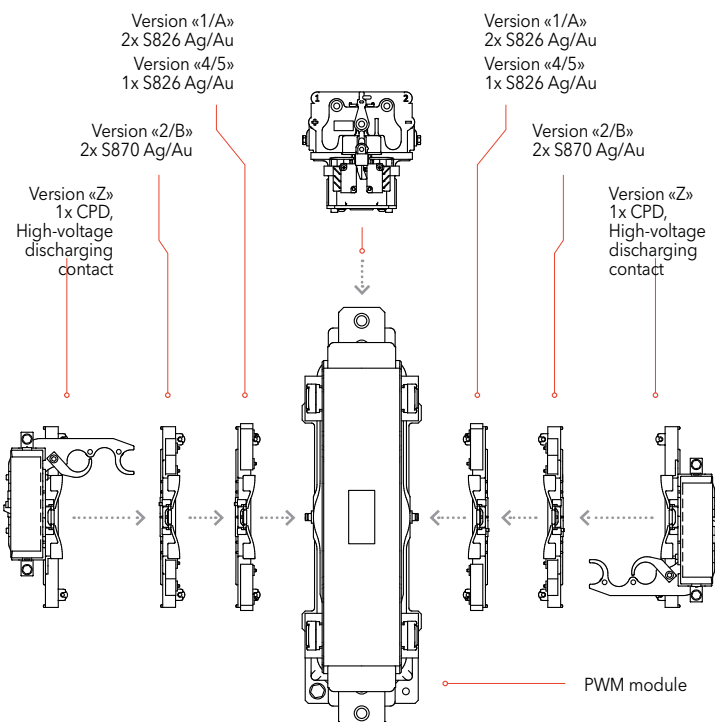





**Note:** Presented in this catalogue are only stock items which can be supplied in short delivery time. For some variants minimum quantities apply. Please do not hesitate to ask for the conditions.

**Special variants:** If you need a special variant of the contactor, please do not hesitate to contact us. Maybe the type of contactor you are looking for is among our many special designs. If not, we can also supply customized designs. In this case, however, minimum order quantities apply.

\*1 Pre-charging contactor:  
CP11xx-12 /-15 /-20: Integrated, factory mounting  
CP11xx-06 /-08 /-10: Separate, mounting on customer side

\*2 Only coil version bistable:  
An auxiliary switch is required to monitor the switching status. Positions 1 or 5 are reserved for this, depending on whether the customer requires another auxiliary switch. The auxiliary switch on the left-hand side, rear position, is always permanently provided for monitoring the switching status and is not available to the customer.

## Specifications - 1 pole power contactors for AC and DC, $U_n$ up to 3,000 V and $I_{th}$ up to 600 A

Series		CP1115/06   CP1130/06	CP2115/06   CP2130/06	CP3115/06   CP3130/06
Type of voltage		DC (bi-directional), AC ( $f \leq 60$ Hz)	DC (bi-directional), AC ( $f \leq 60$ Hz)	DC (bi-directional), AC ( $f \leq 60$ Hz)
Number of poles, configuration		1x, SPST-NO	1x, SPST-NC	1x, SPDT-DB
		1  2	1  2	1  2 3  4
<b>Electrical data according to IEC 60077-2</b>				
Nominal voltage	$U_n$	1,500 V   3,000 V	1,500 V   3,000 V	1,500 V   3,000 V
Rated operating voltage	$U_e/U_r$	1,800 V   3,600 V	1,800 V   3,600 V	1,800 V   3,600 V
Rated insulation voltage	$U_{Nm}$	3,000 V   4,250 V	3,000 V   4,250 V	3,000 V   4,250 V
Rated impulse withstand voltage	$U_{Ni}$	15 kV   25 kV	15 kV   25 kV	15 kV   25 kV
Pollution degree / Overvoltage category		PD3 / OV3	PD3 / OV3	PD3 / OV3
Switching overvoltages	@ $U_e/U_r = 1,800$ V / @ $U_e/U_r = 3,600$ V	< 3x $U_{Nm}$	< 3x $U_{Nm}$	0 V*2
Conventional thermal current	$I_{th}$	600 A*1	600 A*1	600 A*1
Component category		A2	A2	A4
Short-circuit making capacity	NO / NC	8 ... 10 kA / ---	--- / approx. 2 kA	8 ... 10 kA / approx. 2 kA
Rated operating current $I_e/I_r$	Arc chamber			
Operational frequency C1				
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	200 A / 200 A / 0 A*2	--- / --- / 0 A*2	--- / --- / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	200 A / 200 A / 0 A*2	--- / --- / 0 A*2	--- / --- / 0 A*2
Rated short-circuit breaking capacity	Arc chamber			
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	900 A / 430 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	350 A / tbd*3 / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	4,600 A / 1,700 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	2,000 A / 500 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	4,000 A / 3,000 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	1,200 A / 600 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
cosp = 1, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	6,000 A / 4,500 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
cosp = 1, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	1,800 A / 1,100 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
Rated short-time withstand current $I_{cw}$ @ T < 100 ms	NO / NC	10 ... 12 kA / ---	--- / approx. 2 kA	10 ... 12 kA / approx. 2 kA
Critical current range		none	none	---*2
Design				
Contact material		AgSnO <sub>2</sub>	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Terminals / Torque		1x M10 / 16 ... 20 Nm	1x M10 / 16 ... 20 Nm	1x M10 / 16 ... 20 Nm
<b>Auxiliary switches</b>				
Number max. / configuration		4x max.*4 / 1x S870 (a1) + 1x S870 (b0) + 2x, S826*5 or 4x S826		
Contact material		Silver, gold		
Switching capacity	SPDT-DB S826, silver contacts	AC-15: 230 V / 1.0 A	DC-13: 110 V / 0.5 A	
	SPDT-DB S826, gold contacts	AC-15: 230 V / 0.1 A	DC-13: 110 V / 0.1 A	
	SPDT S870, silver contacts	AC-15: 230 V / 1.5 A	DC-13: 60 V / 0.5 A	
	SPDT S870, gold contacts	AC-15: 230 V / 1.0 A	DC-13: 60 V / 0.5 A	
Terminals		Screw M3		
<b>Pre-charging contactor, high-voltage discharging contact</b>				
Pre-charging contactor, CPP1115/02	$U_n, I_{th}$	1x, SPST-NO, $U_{Nm} = 3,600$ V @ PD2/OV2, $I_{th} = 200$ A, see catalogue C45.en		
High-voltage discharging contact, CPD	$U_n, I_{th}$	1x, SPST-NC, $U_{Nm} = 3,600$ V, $I_{th} = 80$ A (only for CP1xxx and switching inverse to the main contact)		
Making/breaking capacity		850 A / 250 A (T = 1 ms, DC)		
<b>Magnetic drive</b>				
Coil voltage/range (design)	$U_S$	24 / 36 ... 60 / 72 ... 110 V DC (mono or bistable with integrated PWM module)		
Control inputs (only coil version N, B)	$U_{St} / I_{St}$	8 ... 400 V / 1 mA (failsafe, version N only)		
Pollution degree / overvoltage category		PD3 / OV2		
Coil tolerance		-30 % ... +25 % $U_{SN}$		
Coil power dissipation	@ $U_S$ and $T_a = 20$ °C	Pull-in: 225 W max. @ 250 ms max. / hold: < 10 W*6		
Pull-in voltage	typical @ $T_a = 20$ °C	$U_S < 0.7 \times U_{SN}$		
Pull-in time	typical @ $T_a = 20$ °C	$\leq 160$ ms		
Drop-off voltage	typical @ $T_a = 20$ °C	$U_S \geq 0.1 \times U_{SN}$		
Drop-off time	typical @ $T_a = 20$ °C	$\leq 40$ ms		
Coil suppression		Integrated PWM module (electronic coil controller with suppressor diode)		
Coil terminal		Cage clamp		
<b>Degree of protection</b>				
IP00				
<b>Mechanical endurance</b>				
	@ Coil design, Monostable	> 1 million operating cycles*7		
	Bistable	> 200,000 operating cycles		
<b>Vibration / shock</b>				
	IEC 61373	Category 1, class B		
<b>Mounting position</b>				
horizontal / vertical				
<b>Environmental conditions</b>				
	Operating/Storage temperature	-40 °C ... +70 °C / -40 °C ... +85 °C		
	Altitude/Humidity (IEC 50125-1)	< 2,000 m above sea level / < 75 % yearly average		
<b>Weight</b>				
	depending on configuration	approx. 6 ... 10 kg	approx. 6 ... 10 kg	approx. 12 kg

\*1 Ratings for IEC 60077-2; ratings for other standards on request.

\*2 Cover for main contact system, version "D", breaking capacity: No load

\*3 On request

\*4 With high-voltage discharging contact, the number of auxiliary contacts is reduced to max. 2


\*5 a1 and b0 according to IEC 60077-2 (auxiliary contact b0 "well open" or mirror contact for feedback circuits of safety-relevant control systems according to EN 13849-1)

\*6 Values for bistable versions on request

\*7 The optional CPD contact limits the mechanical endurance to 600,000 operating cycles



## Specifications - 1 pole power contactors for AC and DC, $U_n$ up to 3,000 V and $I_{th}$ up to 800 A

<b>Series</b>	<b>CP1115/08   CP1130/08</b>	
Type of voltage	DC (bi-directional), AC ( $f \leq 60$ Hz)	
Number of poles, configuration	1x, SPST-NO	
	1  2	
<b>Electrical data according to IEC 60077-2</b>		
Nominal voltage	$U_n$	1,500 V   3,000 V
Rated operating voltage	$U_e/U_r$	1,800 V   3,600 V
Rated insulation voltage	$U_{Nm}$	3,000 V   4,250 V
Rated impulse withstand voltage	$U_{Ni}$	15 kV   25 kV
Pollution degree / Overvoltage category	PD3 / OV3	
Switching overvoltages	@ $U_e/U_r = 1,800$ V / @ $U_e/U_r = 3,600$ V	< 3x $U_{Nm}$
Conventional thermal current	$I_{th}$	800 A*1
Component category	A2	
Short-circuit making capacity	NO	8 ... 10 kA
Rated operating current $I_e/I_r$	Arc chamber	
Operational frequency C1		
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	200 A / 200 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	200 A / 200 A / 0 A*2
Rated short-circuit breaking capacity	Arc chamber	
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	900 A / 430 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	350 A / tbd*3 / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	4,600 A / 1,700 A / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	2,000 A / 500 A / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	4,000 A / 3,000 A / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	1,200 A / 600 A / 0 A*2
cosp = 1, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	6,000 A / 4,500 A / 0 A*2
cosp = 1, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	1,800 A / 1,100 A / 0 A*2
Rated short-time withstand current $I_{cw}$ @ T < 100 ms	NO	10 ... 12 kA
Critical current range	none	
Design		
Contact material	AgSnO <sub>2</sub>	
Terminals / Torque	1x M10 / 16 ... 20 Nm	
<b>Auxiliary switches</b>		
Number max. / configuration	4x max.*4 / 1x S870 (a1) + 1x S870 (b0) + 2x, S826*5 or 4x S826	
Contact material	Silver, gold	
Switching capacity	SPDT-DB S826, silver contacts	AC-15: 230 V / 1.0 A DC-13: 110 V / 0.5 A
	SPDT-DB S826, gold contacts	AC-15: 230 V / 0.1 A DC-13: 110 V / 0.1 A
	SPDT S870, silver contacts	AC-15: 230 V / 1.5 A DC-13: 60 V / 0.5 A
	SPDT S870, gold contacts	AC-15: 230 V / 1.0 A DC-13: 60 V / 0.5 A
Terminals	Screw M3	
<b>Pre-charging contactor, high-voltage discharging contact</b>		
Pre-charging contactor, CPP1115/02	$U_n, I_{th}$	1x, SPST-NO, $U_{Nm} = 3,600$ V @ PD2/OV2, $I_{th} = 200$ A, see catalogue C45.en
High-voltage discharging contact, CPD	$U_n, I_{th}$	1x, SPST-NC, $U_{Nm} = 3,600$ V, $I_{th} = 80$ A (only for CP1xxx and switching inverse to the main contact)
Making/breaking capacity	850 A / 250 A (T = 1 ms, DC)	
<b>Magnetic drive</b>		
Coil voltage/range (design)	$U_S$	24 / 36 ... 60 / 72 ... 110 V DC (mono or bistable with integrated PWM module)
Control inputs (only coil version N, B)	$U_{St} / I_{St}$	8 ... 400 V / 1 mA (failsafe, version N only)
Pollution degree / overvoltage category	PD3 / OV2	
Coil tolerance	-30 % ... +25 % $U_{SN}$	
Coil power dissipation	@ $U_S$ and $T_a = 20$ °C	Pull-in: 225 W max. @ 250 ms max. / hold: < 10 W*6
Pull-in voltage	typical @ $T_a = 20$ °C	$U_S < 0.7 \times U_{SN}$
Pull-in time	typical @ $T_a = 20$ °C	$\leq 160$ ms
Drop-off voltage	typical @ $T_a = 20$ °C	$U_S \geq 0.1 \times U_{SN}$
Drop-off time	typical @ $T_a = 20$ °C	$\leq 40$ ms
Coil suppression	Integrated PWM module (electronic coil controller with suppressor diode)	
Coil terminal	Cage clamp	
<b>Degree of protection</b>	IP00	
<b>Mechanical endurance</b>	@ Coil design, Monostable	> 1 million operating cycles*7
	Bistable	> 200,000 operating cycles
<b>Vibration / shock</b>	IEC 61373	Category 1, class B
<b>Mounting position</b>	horizontal / vertical	
<b>Environmental conditions</b>	Operating/Storage temperature	-40 °C ... +70 °C / -40 °C ... +85 °C
	Altitude/Humidity (IEC 50125-1)	< 2,000 m above sea level / < 75 % yearly average
<b>Weight</b>	depending on configuration	approx. 6 ... 10 kg

\*1 Ratings for IEC 60077-2; ratings for other standards on request.

\*2 Cover for main contact system, version "D", breaking capacity: No load

\*3 On request


\*4 With high-voltage discharging contact, the number of auxiliary contacts is reduced to max. 2

\*5 a1 and b0 according to IEC 60077-2 (auxiliary contact b0 "well open" or mirror contact for feedback circuits of safety-relevant control systems according to EN 13849-1)

\*6 Values for bistable versions on request

\*7 The optional CPD contact limits the mechanical endurance to 600,000 operating cycles

## Specifications - 1 pole power contactors for AC and DC, $U_n$ up to 3,000 V and $I_{th}$ up to 1,000 A

<b>Series</b>	<b>CP1115/10   CP1130/10</b>	
Type of voltage	DC (bi-directional), AC ( $f \leq 60$ Hz)	
Number of poles, configuration	1x, SPST-NO	
	1  2	
<b>Electrical data according to IEC 60077-2</b>		
Nominal voltage	$U_n$	1,500 V   3,000 V
Rated operating voltage	$U_e/U_r$	1,800 V   3,600 V
Rated insulation voltage	$U_{Nm}$	3,000 V   4,250 V
Rated impulse withstand voltage	$U_{Ni}$	15 kV   25 kV
Pollution degree / Overvoltage category		PD3 / OV3
Switching overvoltages	@ $U_e/U_r = 1,800$ V / @ $U_e/U_r = 3,600$ V	< 3x $U_{Nm}$
Conventional thermal current	$I_{th}$	1,000 A*1
Component category		A2
Short-circuit making capacity	NO	8 ... 10 kA
Rated operating current $I_e/I_r$	Arc chamber	
Operational frequency C1		
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	200 A / 200 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	200 A / 200 A / 0 A*2
Rated short-circuit breaking capacity	Arc chamber	
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	900 A / 430 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	350 A / tbd*3 / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	4,600 A / 1,700 A / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	2,000 A / 500 A / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	4,000 A / 3,000 A / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	1,200 A / 600 A / 0 A*2
cosp = 1, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	6,000 A / 4,500 A / 0 A*2
cosp = 1, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	1,800 A / 1,100 A / 0 A*2
Rated short-time withstand current $I_{cw}$ @ T < 100 ms	NO	10 ... 12 kA
Critical current range		none
Design		
Contact material		AgSnO <sub>2</sub>
Terminals / Torque		1x M10 / 16 ... 20 Nm
<b>Auxiliary switches</b>		
Number max. / configuration		4x max.*4 / 1x S870 (a1) + 1x S870 (b0) + 2x, S826*5 or 4x S826
Contact material		Silver, gold
Switching capacity	SPDT-DB S826, silver contacts	AC-15: 230 V / 1.0 A DC-13: 110 V / 0.5 A
	SPDT-DB S826, gold contacts	AC-15: 230 V / 0.1 A DC-13: 110 V / 0.1 A
	SPDT S870, silver contacts	AC-15: 230 V / 1.5 A DC-13: 60 V / 0.5 A
	SPDT S870, gold contacts	AC-15: 230 V / 1.0 A DC-13: 60 V / 0.5 A
Terminals		Screw M3
<b>Pre-charging contactor, high-voltage discharging contact</b>		
Pre-charging contactor, CPP1115/02	$U_n, I_{th}$	1x, SPST-NO, $U_{Nm} = 3,600$ V @ PD2/OV2, $I_{th} = 200$ A, see catalogue C45.en
High-voltage discharging contact, CPD	$U_n, I_{th}$	1x, SPST-NC, $U_{Nm} = 3,600$ V, $I_{th} = 80$ A (only for CP1xxx and switching inverse to the main contact)
Making/breaking capacity		850 A / 250 A (T = 1 ms, DC)
<b>Magnetic drive</b>		
Coil voltage/range (design)	$U_S$	24 / 36 ... 60 / 72 ... 110 V DC (mono or bistable with integrated PWM module)
Control inputs (only coil version N, B)	$U_{St} / I_{St}$	8 ... 400 V / 1 mA (failsafe, version N only)
Pollution degree / overvoltage category		PD3 / OV2
Coil tolerance		-30 % ... +25 % $U_{SN}$
Coil power dissipation	@ $U_S$ and $T_a = 20$ °C	Pull-in: 225 W max. @ 250 ms max. / hold: < 10 W*6
Pull-in voltage	typical @ $T_a = 20$ °C	$U_S < 0.7 \times U_{SN}$
Pull-in time	typical @ $T_a = 20$ °C	$\leq 160$ ms
Drop-off voltage	typical @ $T_a = 20$ °C	$U_S \geq 0.1 \times U_{SN}$
Drop-off time	typical @ $T_a = 20$ °C	$\leq 40$ ms
Coil suppression		Integrated PWM module (electronic coil controller with suppressor diode)
Coil terminal		Cage clamp
<b>Degree of protection</b>		IP00
<b>Mechanical endurance</b>	@ Coil design, Monostable	> 1 million operating cycles*7
	Bistable	> 200,000 operating cycles
<b>Vibration / shock</b>	IEC 61373	Category 1, class B
<b>Mounting position</b>		horizontal / vertical
<b>Environmental conditions</b>	Operating/Storage temperature	-40 °C ... +70 °C / -40 °C ... +85 °C
	Altitude/Humidity (IEC 50125-1)	< 2,000 m above sea level / < 75 % yearly average
<b>Weight</b>	depending on configuration	approx. 6 ... 10 kg

\*1 Ratings for IEC 60077-2; ratings for other standards on request.

\*2 Cover for main contact system, version "D", breaking capacity: No load

\*3 On request

\*4 With high-voltage discharging contact, the number of auxiliary contacts is reduced to max. 2





\*5 a1 and b0 according to IEC 60077-2 (auxiliary contact b0 "well open" or mirror contact for feedback circuits of safety-relevant control systems according to EN 13849-1)

\*6 Values for bistable versions on request

\*7 The optional CPD contact limits the mechanical endurance to 600,000 operating cycles



## Specifications - 1 pole power contactors for AC and DC, $U_n$ up to 3,000 V and $I_{th}$ up to 1,200 A

Series		CP1115/12   CP1130/12	CP2115/12   CP2130/12	CP3115/12   CP3130/12
Type of voltage		DC (bi-directional), AC ( $f \leq 60$ Hz)	DC (bi-directional), AC ( $f \leq 60$ Hz)	DC (bi-directional), AC ( $f \leq 60$ Hz)
Number of poles, configuration		1x, SPST-NO	1x, SPST-NC	1x, SPDT-DB
		1  2	1  2	1  2 3  4
<b>Electrical data according to IEC 60077-2</b>				
Nominal voltage	$U_n$	1,500 V   3,000 V	1,500 V   3,000 V	1,500 V   3,000 V
Rated operating voltage	$U_e/U_r$	1,800 V   3,600 V	1,800 V   3,600 V	1,800 V   3,600 V
Rated insulation voltage	$U_{Nm}$	3,000 V   4,800 V	3,000 V   4,800 V	3,000 V   4,800 V
Rated impulse withstand voltage	$U_{Ni}$	15 kV   25 kV	15 kV   25 kV	15 kV   25 kV
Pollution degree / Overvoltage category		PD3 / OV3	PD3 / OV3	PD3 / OV3
Switching overvoltages	@ $U_e/U_r = 1,800$ V / @ $U_e/U_r = 3,600$ V	< $3x U_{Nm}$	< $3x U_{Nm}$	0 V*2
Conventional thermal current	$I_{th}$	1,200 A*1	1,200 A*1	1,200 A*1
Component category		A2	A2	A4
Short-circuit making capacity	NO / NC	12 kA / ---	--- / approx. 1.2 kA	approx. 12 kA / approx. 1.2 kA
Rated operating current $I_e/I_r$	Arc chamber			
Operational frequency C1				
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	450 A / 450 A / 0 A*2	--- / --- / 0 A*2	--- / --- / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	400 A / 200 A / 0 A*2	--- / --- / 0 A*2	--- / --- / 0 A*2
Rated short-circuit breaking capacity	Arc chamber			
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	2,000 A / 1,000 A / 0 A*2	tbd*3 / 1,000 A / 0 A*2	--- / --- / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	900 A / 200 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	4,000 A / 2,500 A / 0 A*2	tbd*3 / 1,200 A / 0 A*2	--- / --- / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	2,200 A / 1,000 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
$c_{osp} = 0,8$ , AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tbd*3 / 1,800 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
$c_{osp} = 0,8$ , AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tbd*3 / tbd*3 / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
$c_{osp} = 1$ , AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	5,000 A / 2,300 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
$c_{osp} = 1$ , AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	2,400 A / 1,400 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2	--- / --- / 0 A*2
Rated short-time withstand current $I_{cw}$ @ T < 100 ms	NO / NC	15 kA / ---	--- / 8 kA	15 kA / 8 kA
Critical current range		none	none	--- *2
Design				
Contact material		AgSnO <sub>2</sub>	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Terminals / Torque		2x M12 / 24 ... 30 Nm	2x M12 / 24 ... 30 Nm	2x M12 / 24 ... 30 Nm
<b>Auxiliary switches</b>				
Number max. / configuration		4x max.*4 / 1x S870 (a1) + 1x S870 (b0) + 2x, S826*5 or 4x S826		
Contact material		Silver, gold		
Switching capacity	SPDT-DB S826, silver contacts	AC-15: 230 V / 1.0 A	DC-13: 110 V / 0.5 A	
	SPDT-DB S826, gold contacts	AC-15: 230 V / 0.1 A	DC-13: 110 V / 0.1 A	
	SPDT S870, silver contacts	AC-15: 230 V / 1.5 A	DC-13: 60 V / 0.5 A	
	SPDT S870, gold contacts	AC-15: 230 V / 1.0 A	DC-13: 60 V / 0.5 A	
Terminals		Screw M3		
<b>Pre-charging contactor, high-voltage discharging contact</b>				
Pre-charging contactor, CPP1115/02	$U_n, I_{th}$	1x, SPST-NO, $U_{Nm} = 3,600$ V @ PD2/OV2, $I_{th} = 200$ A, see catalogue C45.en		
High-voltage discharging contact, CPD	$U_n, I_{th}$	1x, SPST-NC, $U_{Nm} = 3,600$ V, $I_{th} = 80$ A (only for CP1xxx and switching inverse to the main contact)		
Making/breaking capacity		850 A / 250 A (T = 1 ms, DC)		
<b>Magnetic drive</b>				
Coil voltage/range (design)	$U_S$	24 / 36 ... 60 / 72 ... 110 V DC (mono or bistable with integrated PWM module)		
Control inputs (only coil version N, B)	$U_{St} / I_{St}$	8 ... 400 V / 1 mA (failsafe, version N only)		
Pollution degree / overvoltage category		PD3 / OV2		
Coil tolerance		-30 % ... +25 % $U_{SN}$		
Coil power dissipation	@ $U_S$ and $T_a = 20$ °C	Pull-in: 225 W max. @ 250 ms max. / hold: < 10 W *6		
Pull-in voltage	typical @ $T_a = 20$ °C	$U_S < 0.7 \times U_{SN}$		
Pull-in time	typical @ $T_a = 20$ °C	$\leq 160$ ms		
Drop-off voltage	typical @ $T_a = 20$ °C	$U_S \geq 0.1 \times U_{SN}$		
Drop-off time	typical @ $T_a = 20$ °C	$\leq 40$ ms		
Coil suppression		Integrated PWM module (electronic coil controller with suppressor diode)		
Coil terminal		Cage clamp		
<b>Degree of protection</b>				
IP00				
<b>Mechanical endurance</b>				
	@ Coil design, Monostable	> 1 million operating cycles *7		
	Bistable	> 200,000 operating cycles		
<b>Vibration / shock</b>				
	IEC 61373	Category 1, class B		
<b>Mounting position</b>				
horizontal / vertical				
<b>Environmental conditions</b>				
	Operating/Storage temperature	-40 °C ... +70 °C / -40 °C ... +85 °C		
	Altitude/Humidity (IEC 50125-1)	< 2,000 m above sea level / < 75 % yearly average		
<b>Weight</b>				
	depending on configuration	approx. 11 ... 18 kg	approx. 11 ... 18 kg	approx. 12 ... 19 kg

\*1 Ratings for IEC 60077-2; ratings for other standards on request.

\*2 Cover for main contact system, version "D", breaking capacity: No load

\*3 On request


\*4 With high-voltage discharging contact, the number of auxiliary contacts is reduced to max. 2

\*5 a1 and b0 according to IEC 60077-2 (auxiliary contact b0 "well open" or mirror contact for feedback circuits of safety-relevant control systems according to EN 13849-1)

\*6 Values for bistable versions on request

\*7 The optional CPD contact limits the mechanical endurance to 600,000 operating cycles

## Specifications - 1 pole power contactors for AC and DC, $U_n$ up to 3,000 V and $I_{th}$ up to 1,500 A

<b>Series</b>	<b>CP1115/15   CP1130/15</b>	
Type of voltage	DC (bi-directional), AC ( $f \leq 60$ Hz)	
Number of poles, configuration	1x, SPST-NO	
	1  2	
<b>Electrical data according to IEC 60077-2</b>		
Nominal voltage	$U_n$	1,500 V   3,000 V
Rated operating voltage	$U_e/U_r$	1,800 V   3,600 V
Rated insulation voltage	$U_{Nm}$	3,000 V   4,800 V
Rated impulse withstand voltage	$U_{Ni}$	15 kV   25 kV
Pollution degree / Overvoltage category		PD3 / OV3
Switching overvoltages	@ $U_e/U_r = 1,800$ V / @ $U_e/U_r = 3,600$ V	< 3x $U_{Nm}$
Conventional thermal current	$I_{th}$	1,500 A*1
Component category		A2
Short-circuit making capacity	NO	12 kA
Rated operating current $I_e/I_r$	Arc chamber	
Operational frequency C1		
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	450 A / 450 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	400 A / 200 A / 0 A*2
Rated short-circuit breaking capacity	Arc chamber	
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	2,000 A / 1,000 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	900 A / 200 A / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	4,000 A / 2,500 A / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	2,200 A / 1,000 A / 0 A*2
$\cos\phi = 0,8$ , AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tb <sup>d</sup> *3 / 1,800 A / 0 A*2
$\cos\phi = 0,8$ , AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tb <sup>d</sup> *3 / tb <sup>d</sup> *3 / 0 A*2
$\cos\phi = 1$ , AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	5,000 A / 2,300 A / 0 A*2
$\cos\phi = 1$ , AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	2,400 A / 1,400 A / 0 A*2
Rated short-time withstand current $I_{cw}$ @ T < 100 ms	NO	15 kA
Critical current range		none
Design		
Contact material		AgSnO <sub>2</sub>
Terminals / Torque		2x M12 / 24 ... 30 Nm
<b>Auxiliary switches</b>		
Number max. / configuration		4x max.*4 / 1x S870 (a1) + 1x S870 (b0) + 2x, S826*5 or 4x S826
Contact material		Silver, gold
Switching capacity	SPDT-DB S826, silver contacts	AC-15: 230 V / 1.0 A DC-13: 110 V / 0.5 A
	SPDT-DB S826, gold contacts	AC-15: 230 V / 0.1 A DC-13: 110 V / 0.1 A
	SPDT S870, silver contacts	AC-15: 230 V / 1.5 A DC-13: 60 V / 0.5 A
	SPDT S870, gold contacts	AC-15: 230 V / 1.0 A DC-13: 60 V / 0.5 A
Terminals		Screw M3
<b>Pre-charging contactor, high-voltage discharging contact</b>		
Pre-charging contactor, CPP1115/02	$U_n, I_{th}$	1x, SPST-NO, $U_{Nm} = 3,600$ V @ PD2/OV2, $I_{th} = 200$ A, see catalogue C45.en
High-voltage discharging contact, CPD	$U_n, I_{th}$	1x, SPST-NC, $U_{Nm} = 3,600$ V, $I_{th} = 80$ A (only for CP1xxx and switching inverse to the main contact)
Making/breaking capacity		850 A / 250 A (T = 1 ms, DC)
<b>Magnetic drive</b>		
Coil voltage/range (design)	$U_S$	24 / 36 ... 60 / 72 ... 110 V DC (mono or bistable with integrated PWM module)
Control inputs (only coil version N, B)	$U_{St} / I_{St}$	8 ... 400 V / 1 mA (failsafe, version N only)
Pollution degree / overvoltage category		PD3 / OV2
Coil tolerance		-30 % ... +25 % $U_{SN}$
Coil power dissipation	@ $U_S$ and $T_a = 20$ °C	Pull-in: 225 W max. @ 250 ms max. / hold: < 10 W *6
Pull-in voltage	typical @ $T_a = 20$ °C	$U_S < 0.7 \times U_{SN}$
Pull-in time	typical @ $T_a = 20$ °C	$\leq 160$ ms
Drop-off voltage	typical @ $T_a = 20$ °C	$U_S \geq 0.1 \times U_{SN}$
Drop-off time	typical @ $T_a = 20$ °C	$\leq 40$ ms
Coil suppression		Integrated PWM module (electronic coil controller with suppressor diode)
Coil terminal		Cage clamp
<b>Degree of protection</b>		IP00
<b>Mechanical endurance</b>	@ Coil design, Monostable	> 1 million operating cycles *7
	Bistable	> 200,000 operating cycles
<b>Vibration / shock</b>	IEC 61373	Category 1, class B
<b>Mounting position</b>		horizontal / vertical
<b>Environmental conditions</b>	Operating/Storage temperature	-40 °C ... +70 °C / -40 °C ... +85 °C
	Altitude/Humidity (IEC 50125-1)	< 2,000 m above sea level / < 75 % yearly average
<b>Weight</b>	depending on configuration	approx. 11 ... 18 kg

\*1 Ratings for IEC 60077-2; ratings for other standards on request.

\*2 Cover for main contact system, version "D", breaking capacity: No load

\*3 On request



\*4 With high-voltage discharging contact, the number of auxiliary contacts is reduced to max. 2

\*5 a1 and b0 according to IEC 60077-2 (auxiliary contact b0 "well open" or mirror contact for feedback circuits of safety-relevant control systems according to EN 13849-1)

\*6 Values for bistable versions on request

\*7 The optional CPD contact limits the mechanical endurance to 600,000 operating cycles

## Specifications - 1 pole power contactors for AC and DC, $U_n$ up to 3,000 V and $I_{th}$ up to 2,000 A

Series		CP1115/20   CP1130/20	CP2115/20   CP2130/20
Type of voltage		DC (bi-directional), AC ( $f \leq 60$ Hz)	DC (bi-directional), AC ( $f \leq 60$ Hz)
Number of poles, configuration		1x, SPST-NO 	1x, SPST-NC 
<b>Electrical data according to IEC 60077-2</b>			
Nominal voltage	$U_n$	1,500 V   3,000 V	1,500 V   3,000 V
Rated operating voltage	$U_e/U_r$	1,800 V   3,600 V	1,800 V   3,600 V
Rated insulation voltage	$U_{Nm}$	3,000 V   4,800 V	3,000 V   4,800 V
Rated impulse withstand voltage	$U_{Ni}$	15 kV   25 kV	15 kV   25 kV
Pollution degree / Overvoltage category		PD3 / OV3	PD3 / OV3
Switching overvoltages	@ $U_e/U_r = 1,800$ V / @ $U_e/U_r = 3,600$ V	< 3x $U_{Nm}$	< 3x $U_{Nm}$
Conventional thermal current	$I_{th}$	2,000 A*1	2,000 A*1
Component category		A2	A2
Short-circuit making capacity	NO / NC	approx. 12 kA / ---	--- / approx. 1.2 kA
Rated operating current $I_e/I_r$	Arc chamber		
Operational frequency C1			
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	450 A / 450 A / 0 A*2	--- / --- / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	400 A / 200 A / 0 A*2	--- / --- / 0 A*2
Rated short-circuit breaking capacity	Arc chamber		
T2 = 15 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	2,000 A / 1,000 A / 0 A*2	tbd*3 / 1,000 A / 0 A*2
T2 = 15 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	900 A / 200 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 1,800$ V	A / B / D	4,000 A / 2,500 A / 0 A*2	tbd*3 / 1,600 A / 0 A*2
T2 = 1 ms, DC, $U_e/U_r = 3,600$ V	A / B / D	2,200 A / 1,000 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tbd*3 / 1,800 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2
cosp = 0,8, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tbd*3 / tbd*3 / 0 A*2	tbd*3 / tbd*3 / 0 A*2
cosp = 1, AC, $U_e/U_r = 1,800$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	tbd*3 / 2,300 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2
cosp = 1, AC, $U_e/U_r = 3,600$ V ( $f = 16.7 / f \leq 60$ Hz)	A / B / D	2,400 A / 1,400 A / 0 A*2	tbd*3 / tbd*3 / 0 A*2
Rated short-time withstand current $I_{cw}$ @ T < 100 ms	NO / NC	15 kA / ---	--- / 8 kA
Critical current range		none	none
Design			
Contact material		AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Terminals / Torque		2x M12 / 24 ... 30 Nm	2x M12 / 24 ... 30 Nm
<b>Auxiliary switches</b>			
Number max. / configuration		4x max.*4 / 1x S870 (a1) + 1x S870 (b0) + 2x, S826*5 or 4x S826	
Contact material		Silver, gold	
Switching capacity	SPDT-DB S826, silver contacts	AC-15: 230 V / 1.0 A	DC-13: 110 V / 0.5 A
	SPDT-DB S826, gold contacts	AC-15: 230 V / 0.1 A	DC-13: 110 V / 0.1 A
	SPDT S870, silver contacts	AC-15: 230 V / 1.5 A	DC-13: 60 V / 0.5 A
	SPDT S870, gold contacts	AC-15: 230 V / 1.0 A	DC-13: 60 V / 0.5 A
Terminals		Screw M3	
<b>Pre-charging contactor, high-voltage discharging contact</b>			
Pre-charging contactor, CPP1115/02	$U_n, I_{th}$	1x, SPST-NO, $U_{Nm} = 3,600$ V @ PD2/OV2, $I_{th} = 200$ A, see catalogue C45.en	
High-voltage discharging contact, CPD	$U_n, I_{th}$	1x, SPST-NC, $U_{Nm} = 3,600$ V, $I_{th} = 80$ A (only for CP1xxx and switching inverse to the main contact)	
Making/breaking capacity		850 A / 250 A (T = 1 ms, DC)	
<b>Magnetic drive</b>			
Coil voltage/range (design)	$U_S$	24 / 36 ... 60 / 72 ... 110 V DC (mono or bistable with integrated PWM module)	
Control inputs (only coil version N, B)	$U_{St} / I_{St}$	8 ... 400 V / 1 mA (failsafe, version N only)	
Pollution degree / overvoltage category		PD3 / OV2	
Coil tolerance		-30 % ... +25 % $U_{SN}$	
Coil power dissipation	@ $U_S$ and $T_a = 20$ °C	Pull-in: 225 W max. @ 250 ms max. / hold: < 10 W*6	
Pull-in voltage	typical @ $T_a = 20$ °C	$U_S < 0.7 \times U_{SN}$	
Pull-in time	typical @ $T_a = 20$ °C	$\leq 160$ ms	
Drop-off voltage	typical @ $T_a = 20$ °C	$U_S \geq 0.1 \times U_{SN}$	
Drop-off time	typical @ $T_a = 20$ °C	$\leq 40$ ms	
Coil suppression		Integrated PWM module (electronic coil controller with suppressor diode)	
Coil terminal		Cage clamp	
<b>Degree of protection</b>			
IP00			
<b>Mechanical endurance</b>			
	@ Coil design, Monostable	> 1 million operating cycles*7	
	Bistable	> 200,000 operating cycles	
<b>Vibration / shock</b>			
	IEC 61373	Category 1, class B	
<b>Mounting position</b>			
horizontal / vertical			
<b>Environmental conditions</b>			
	Operating/Storage temperature	-40 °C ... +70 °C / -40 °C ... +85 °C	
	Altitude/Humidity (IEC 50125-1)	< 2,000 m above sea level / < 75 % yearly average	
<b>Weight</b>			
	depending on configuration	approx. 12 ... 19 kg	approx. 12 ... 19 kg

\*1 Ratings for IEC 60077-2; ratings for other standards on request.

\*2 Cover for main contact system, version "D", breaking capacity: No load

\*3 On request


\*4 With high-voltage discharging contact, the number of auxiliary contacts is reduced to max. 2

\*5 a1 and b0 according to IEC 60077-2 (auxiliary contact b0 "well open" or mirror contact for feedback circuits of safety-relevant control systems according to EN 13849-1)


\*6 Values for bistable versions on request

\*7 The optional CPD contact limits the mechanical endurance to 600,000 operating cycles


**Dimension diagram - CP1130-06-A: 1 pole SPST-NO,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 600\text{ A}$**   
**CP2130-06-A: 1 pole SPST-NC,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 600\text{ A}$**

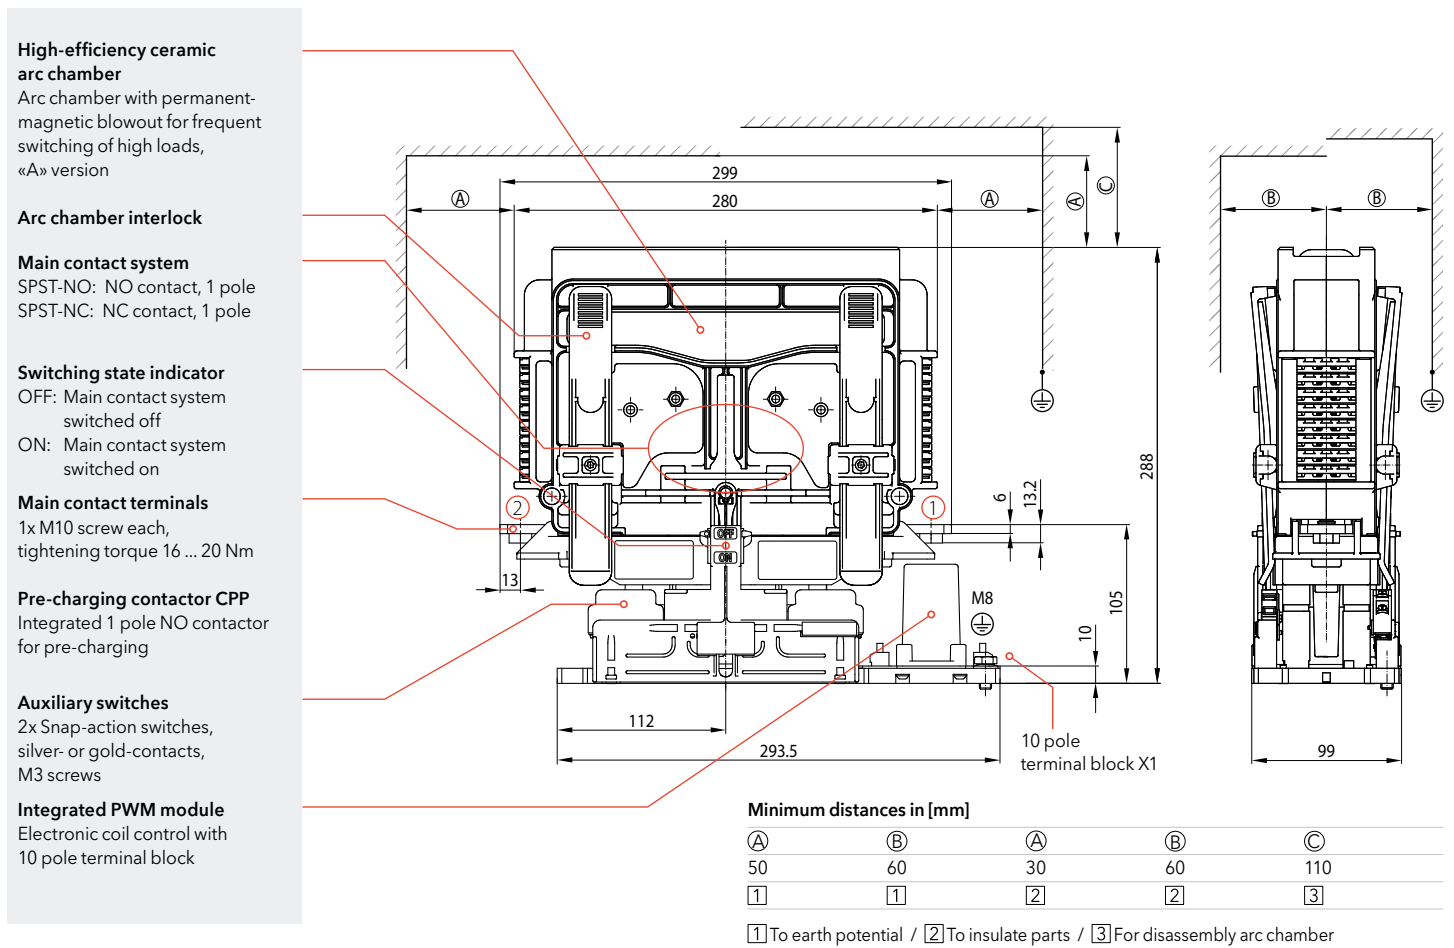


**Dimension diagram - CP1115-06-B: 1 pole SPST-NO,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 600\text{ A}$**   
**CP2115-06-B: 1 pole SPST-NC,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 600\text{ A}$**

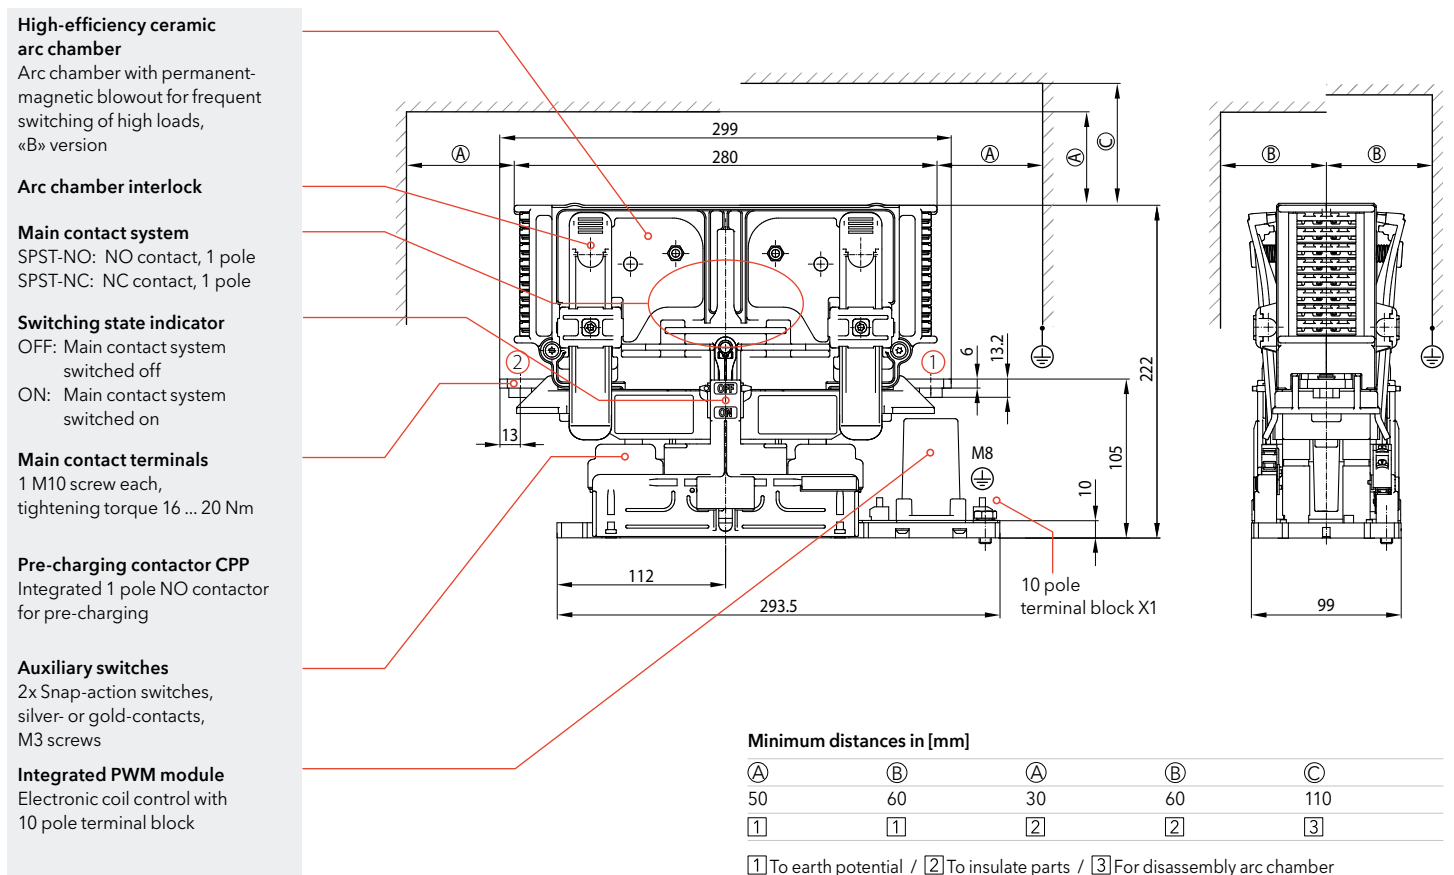


**Dimension diagram - CP1115-06-D/CP1130-06-D: 1 pole SPST-NO,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 600\text{ A}$   
 CP2115-06-D/CP2130-06-D: 1 pole SPST-NC,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 600\text{ A}$**

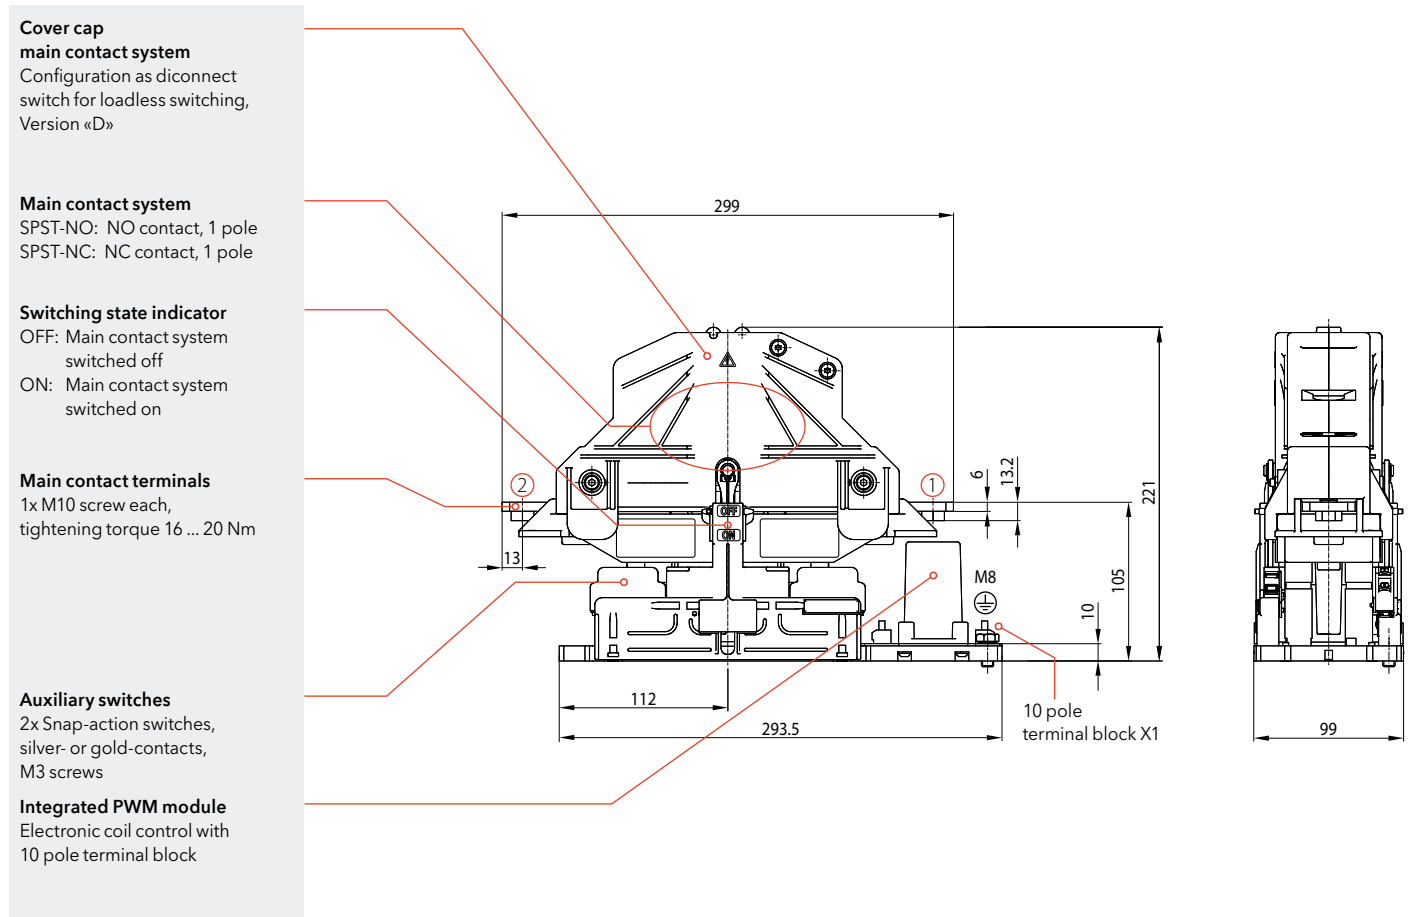


**Dimension diagram - CP3115-06-D/CP3130-06-D: 1 pole SPST-DB,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 600\text{ A}$**

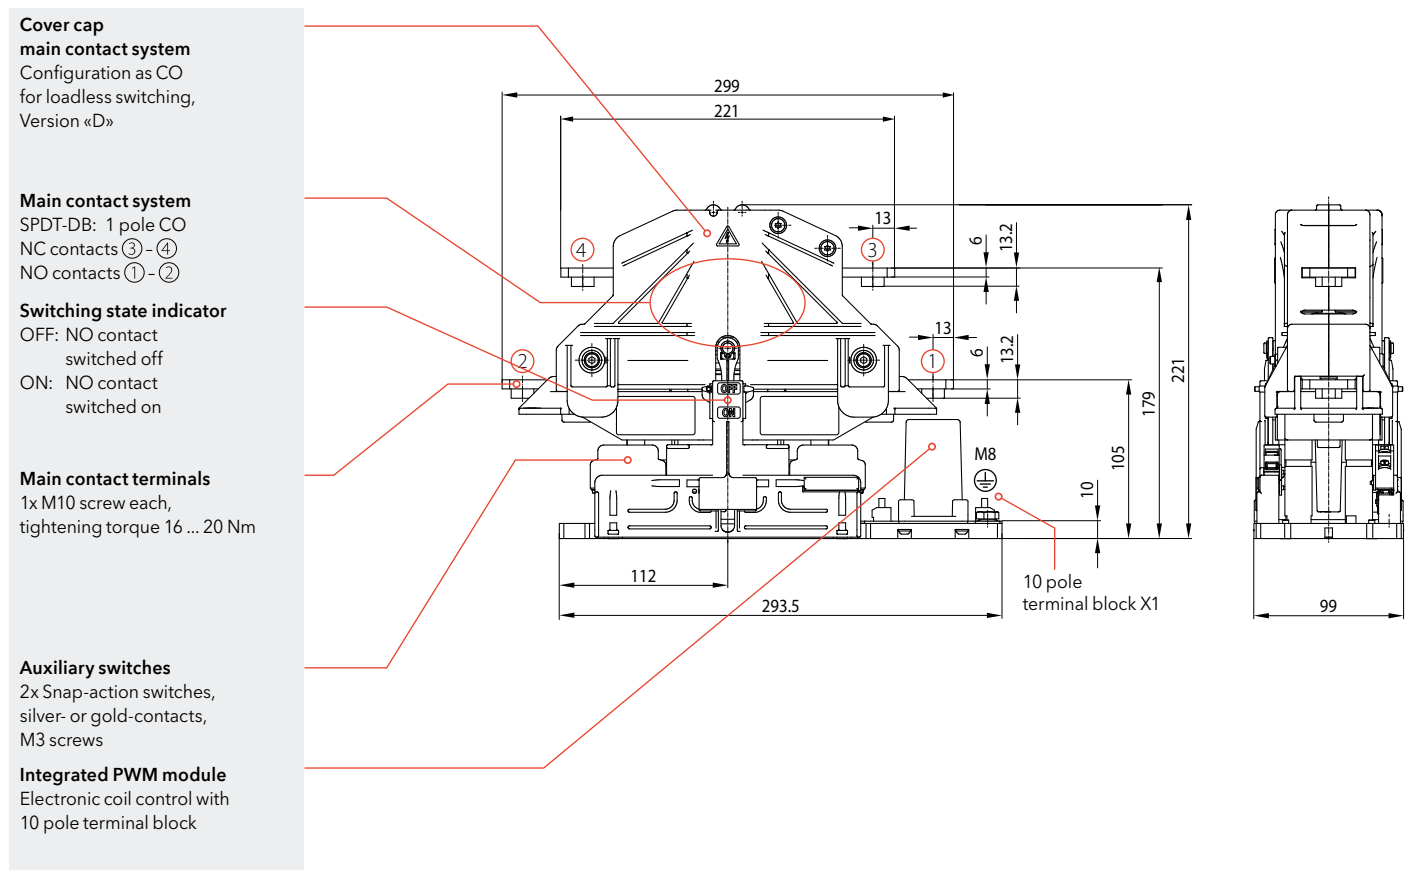

**Dimension diagram - CP1130-08-A: 1 pole SPST-NO,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 800\text{ A}$**

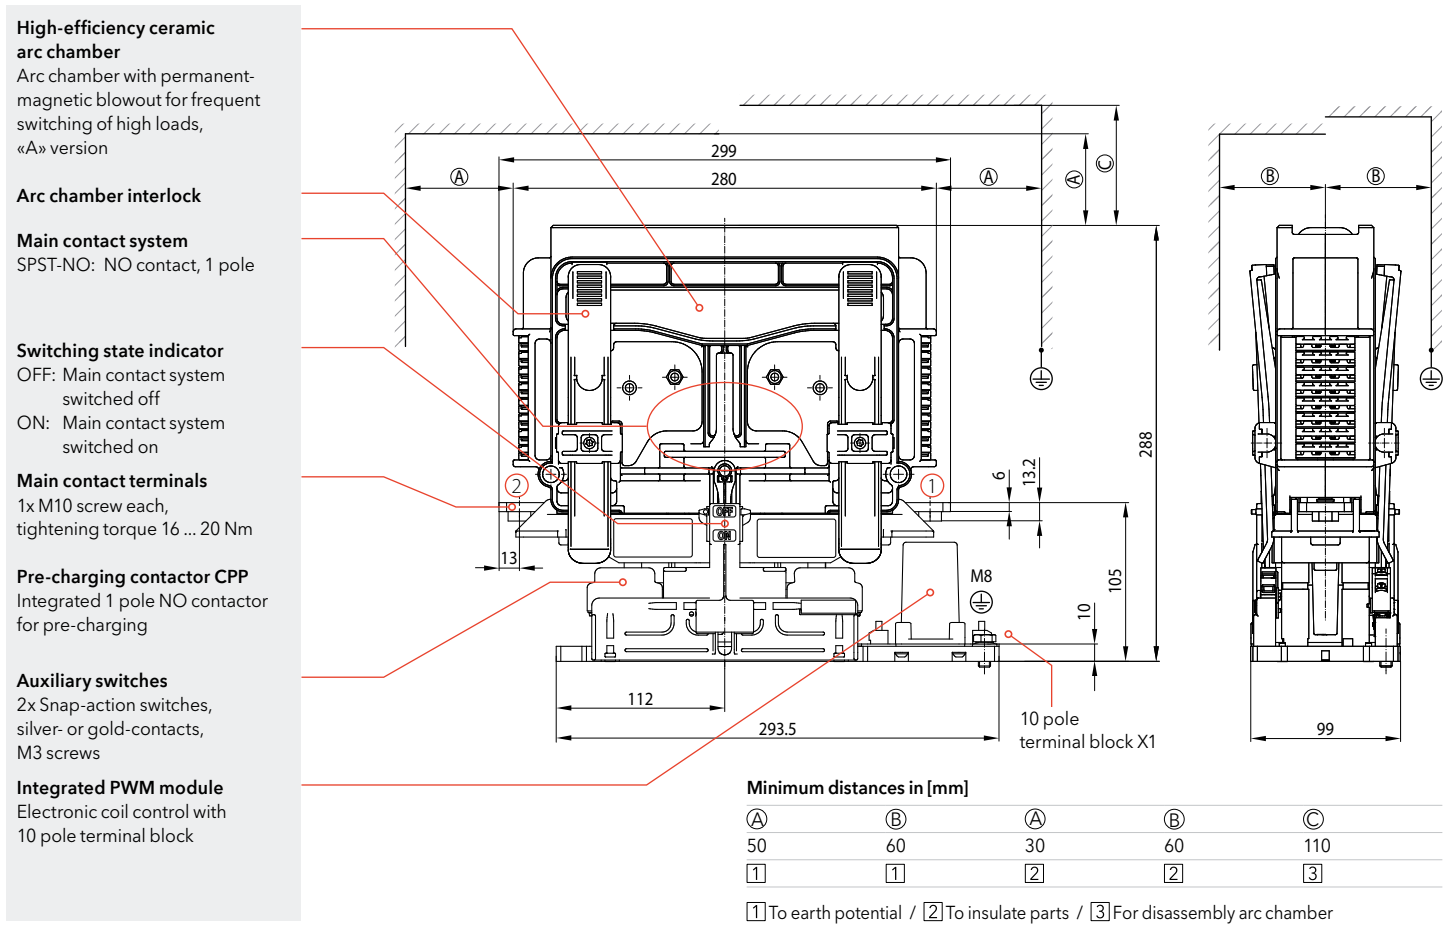


**Dimension diagram - CP1115-08-B: 1 pole SPST-NO,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 800\text{ A}$**

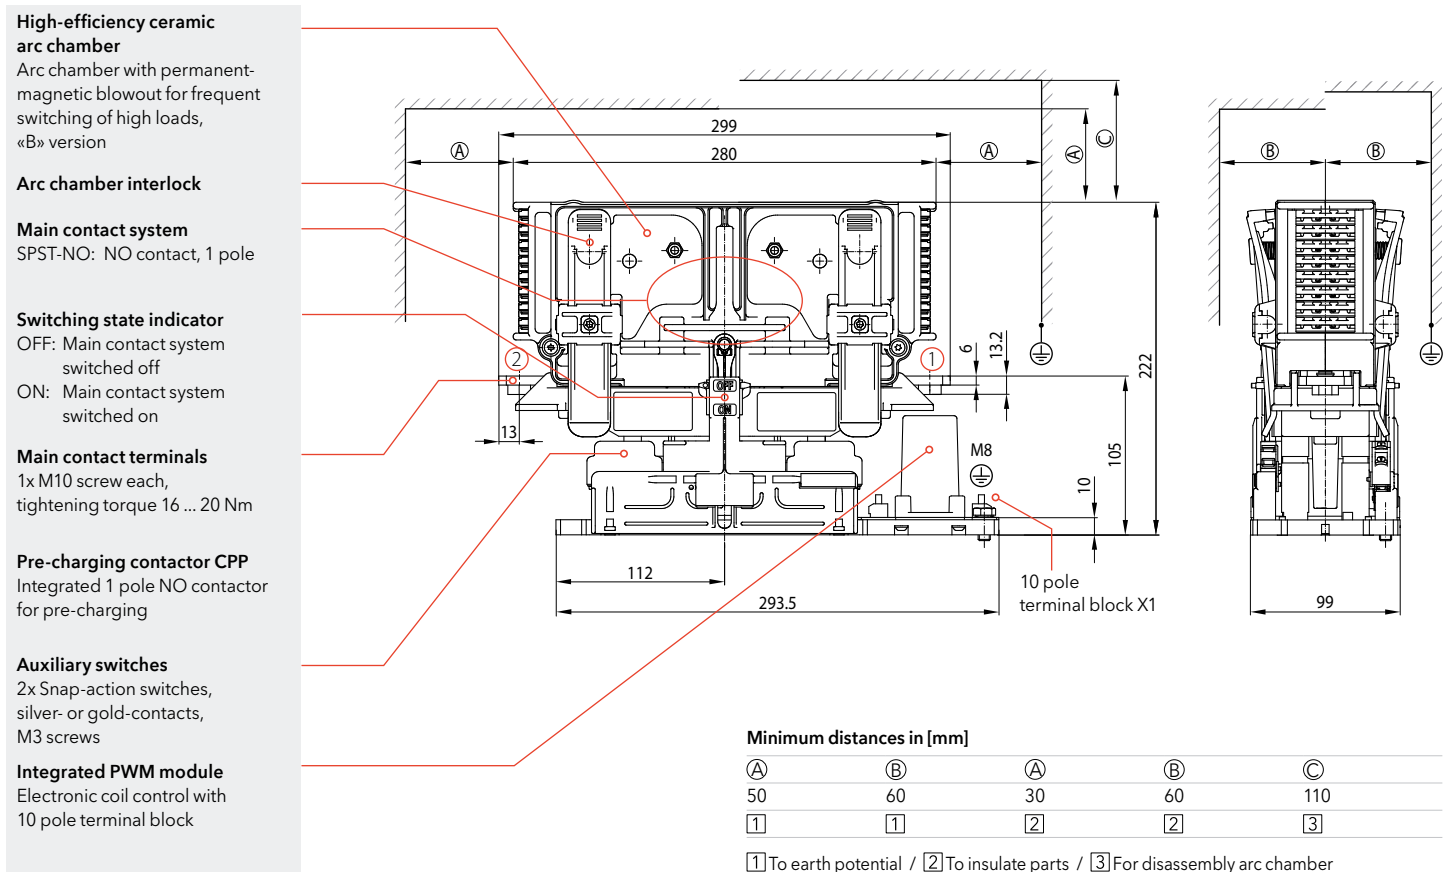





Dimension diagram - CP1115-08-D/CP1130-08-D: 1 pole SPST-NO,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 800\text{ A}$

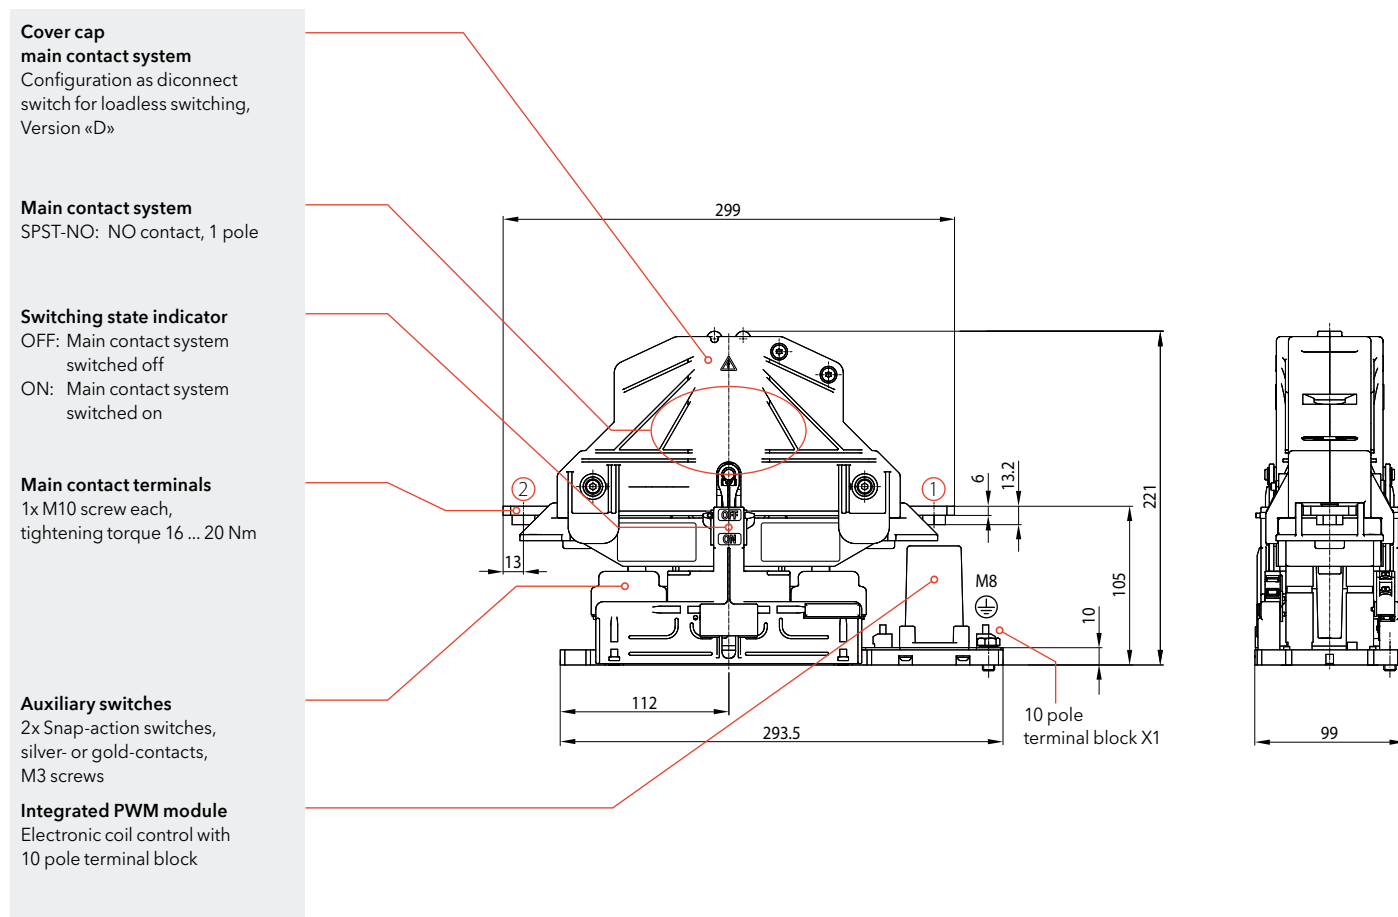


**Dimension diagram - CP1130-10-A: 1 pole SPST-NO,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 1,000\text{ A}$**

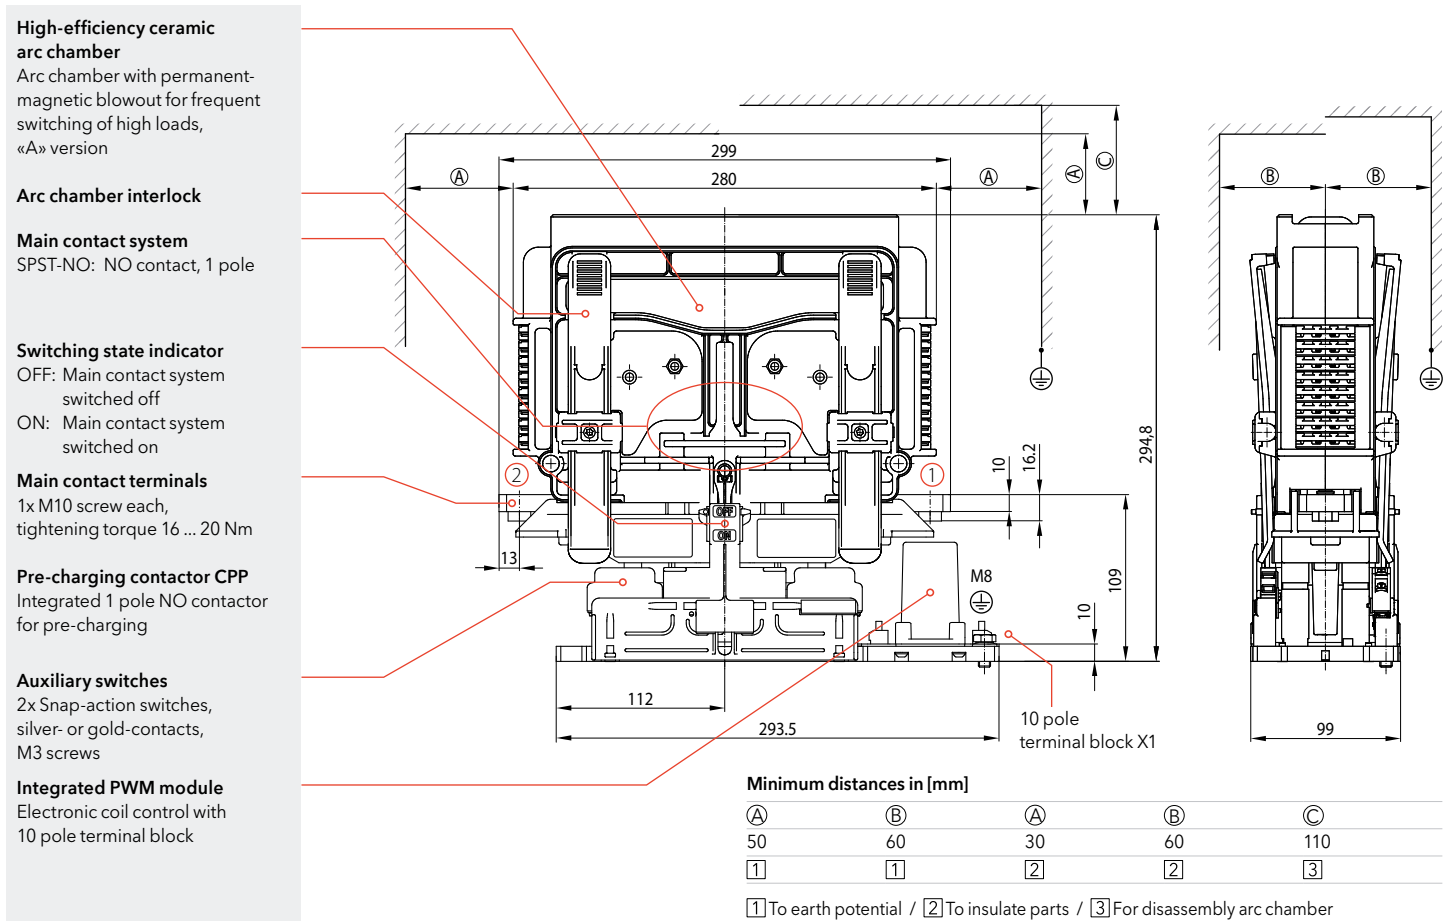


**Dimension diagram - CP1115-10-B: 1 pole SPST-NO,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 1,000\text{ A}$**

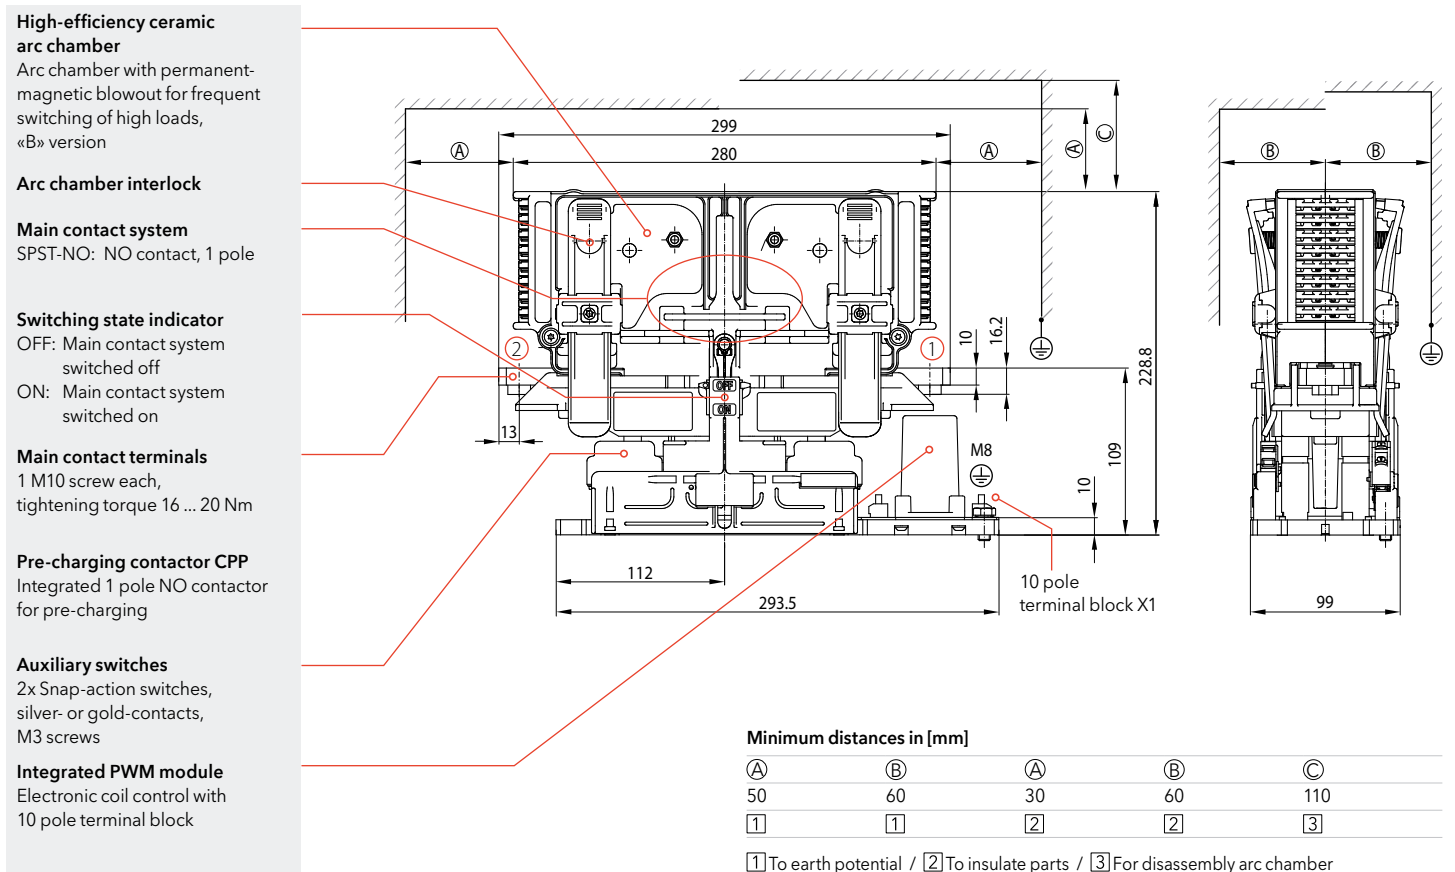


Dimension diagram - CP1115-10-D/CP1130-10-D: 1 pole SPST-NO,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 1,000\text{ A}$

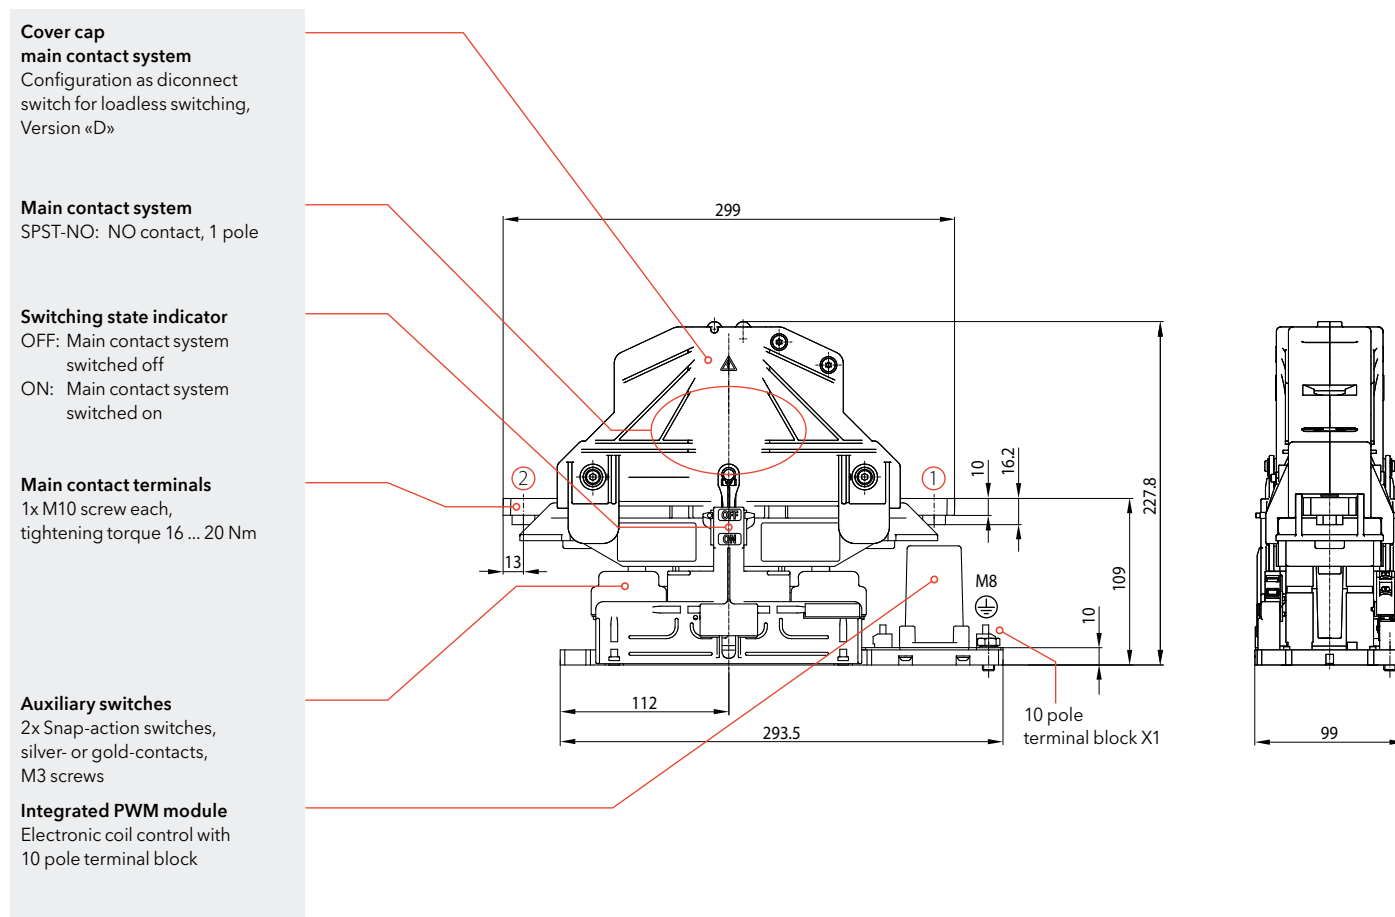


**Dimension diagram - CP1130-12-A: 1 pole SPST-NO,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 1,200\text{ A}$**   
**CP2130-12-A: 1 pole SPST-NC,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 1,200\text{ A}$**

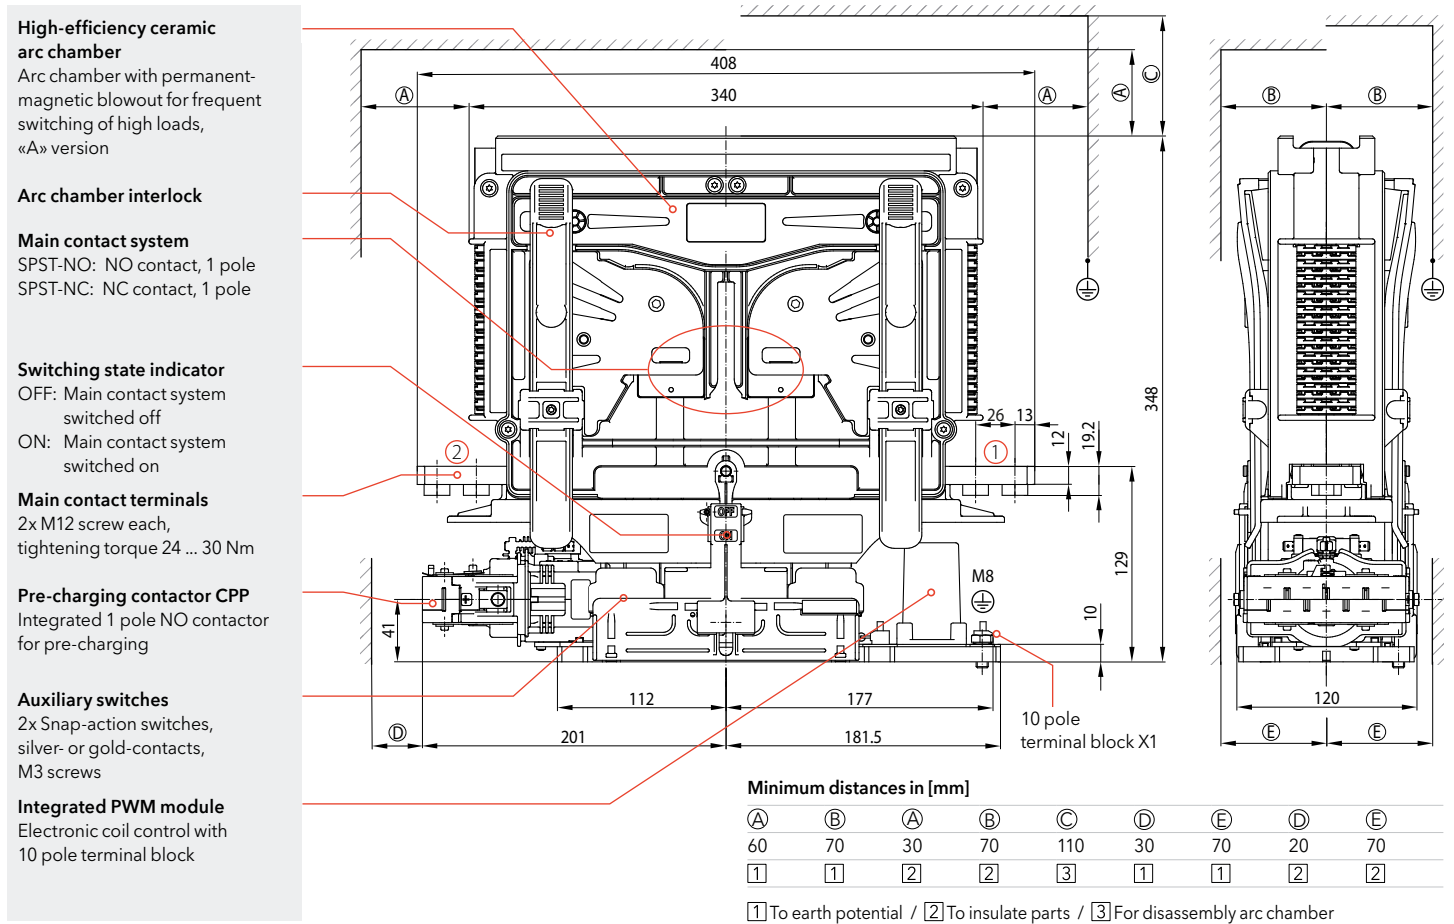


**Dimension diagram - CP1115-12-B: 1 pole SPST-NO,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 1,200\text{ A}$**   
**CP2115-12-B: 1 pole SPST-NC,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 1,200\text{ A}$**

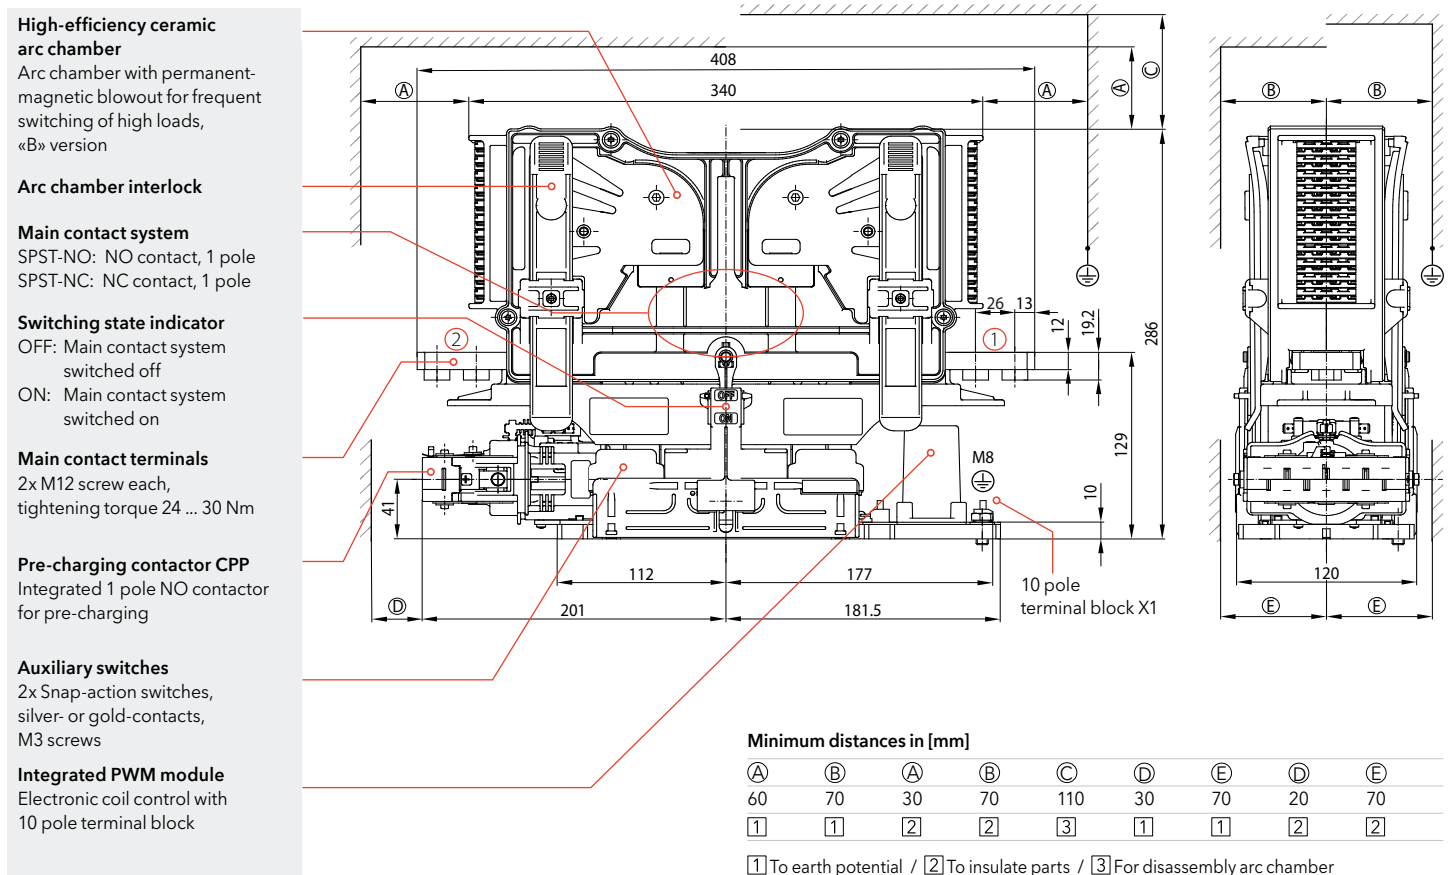


**Dimension diagram - CP1115-12-D/CP1130-12-D: 1 pole SPST-NO,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 1,200\text{ A}$   
 CP2115-12-D/CP2130-12-D: 1 pole SPST-NC,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 1,200\text{ A}$**

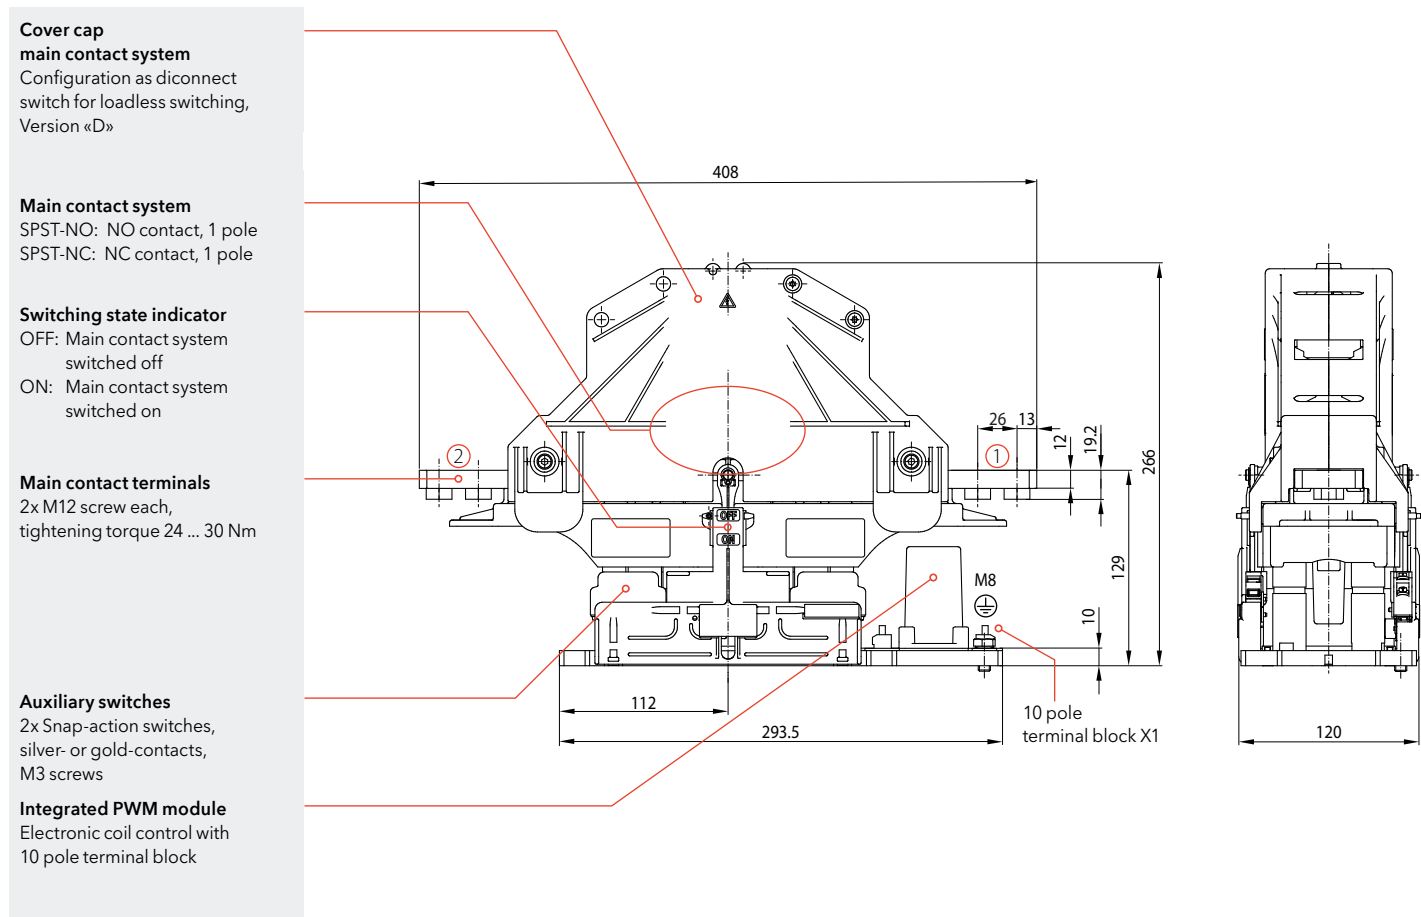


**Dimension diagram - CP3115-12-D/CP3130-12-D: 1 pole SPST-DB,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 1,200\text{ A}$**

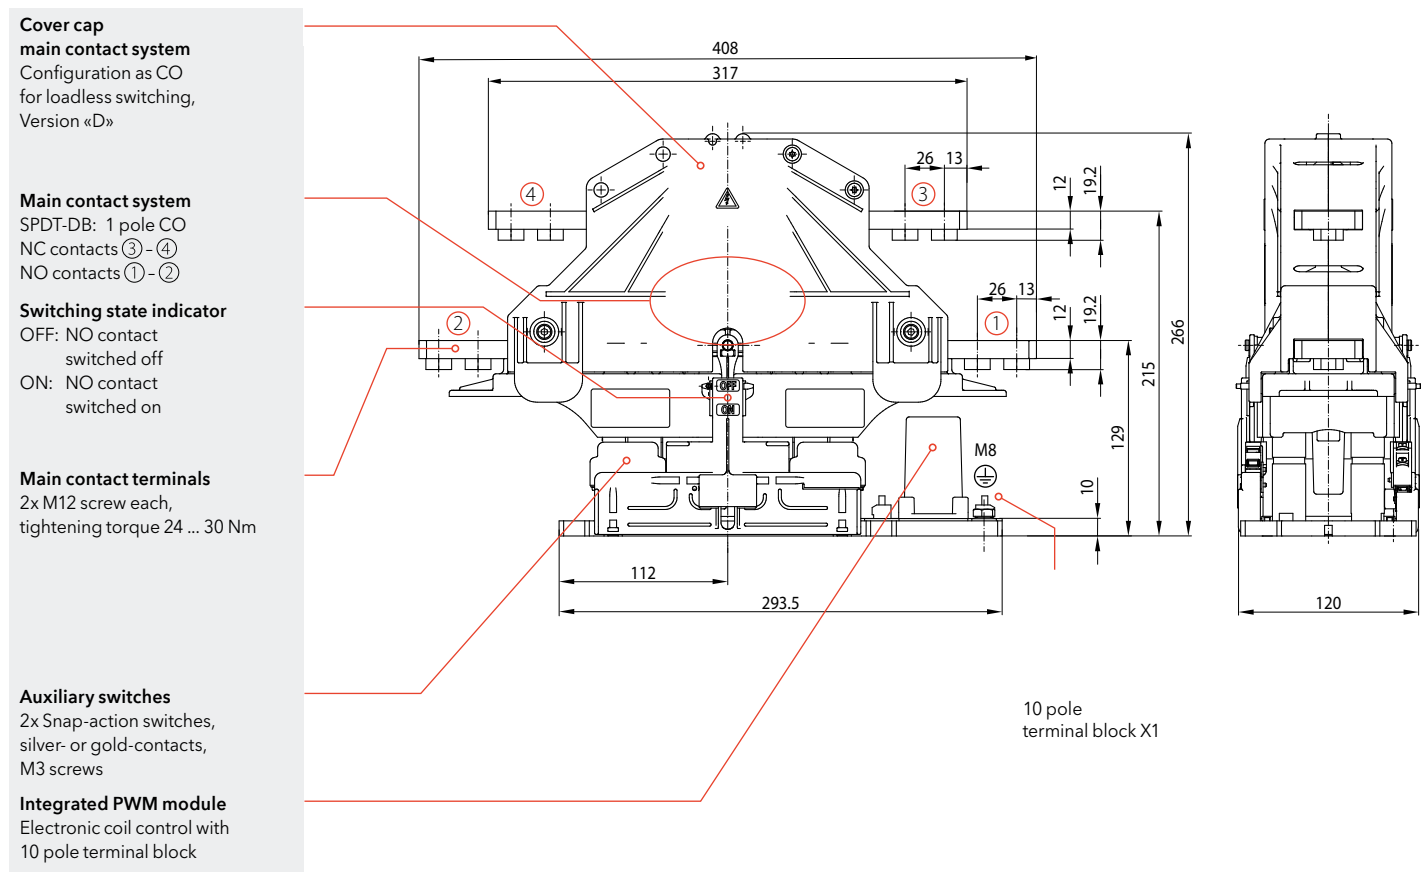

**Dimension diagram - CP1130-15-A: 1 pole SPST-NO,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 1,500\text{ A}$**

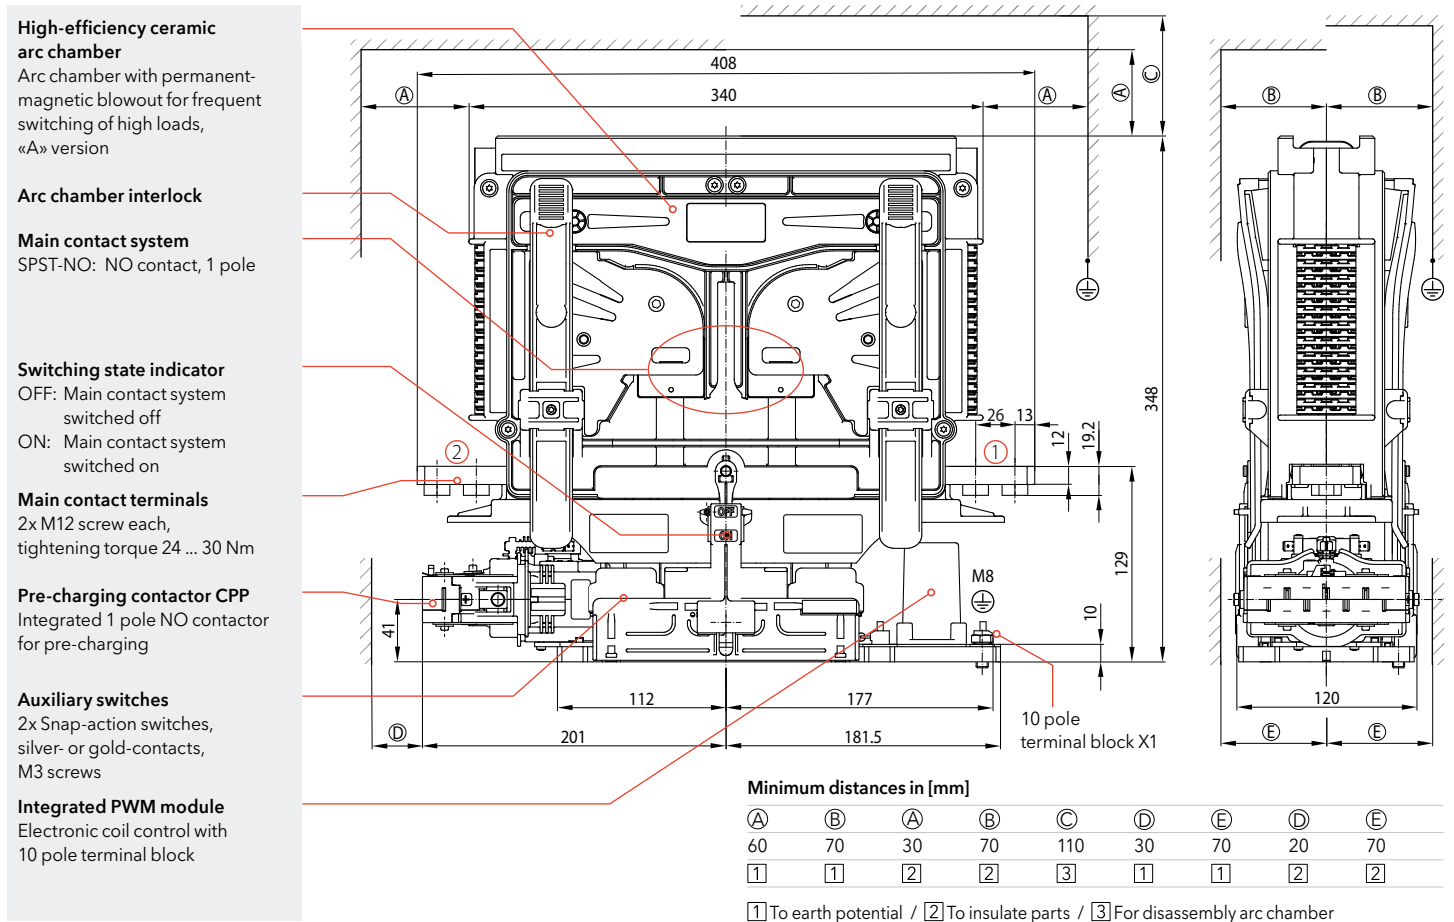


**Dimension diagram - CP1115-15-B: 1 pole SPST-NO,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 1,500\text{ A}$**

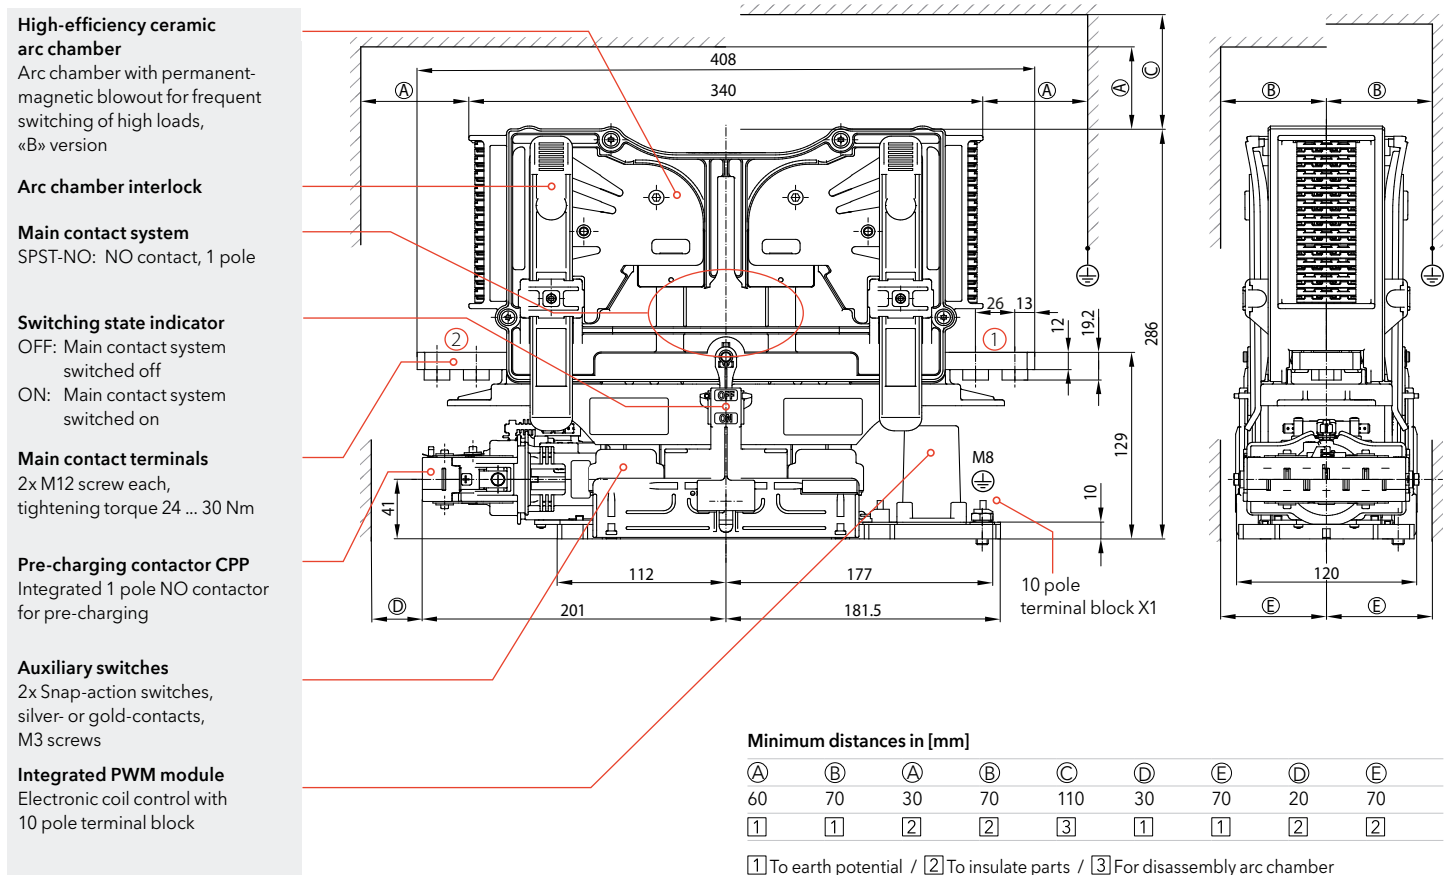





Dimension diagram - CP1115-15-D/CP1130-15-D: 1 pole SPST-NO,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 1,500\text{ A}$

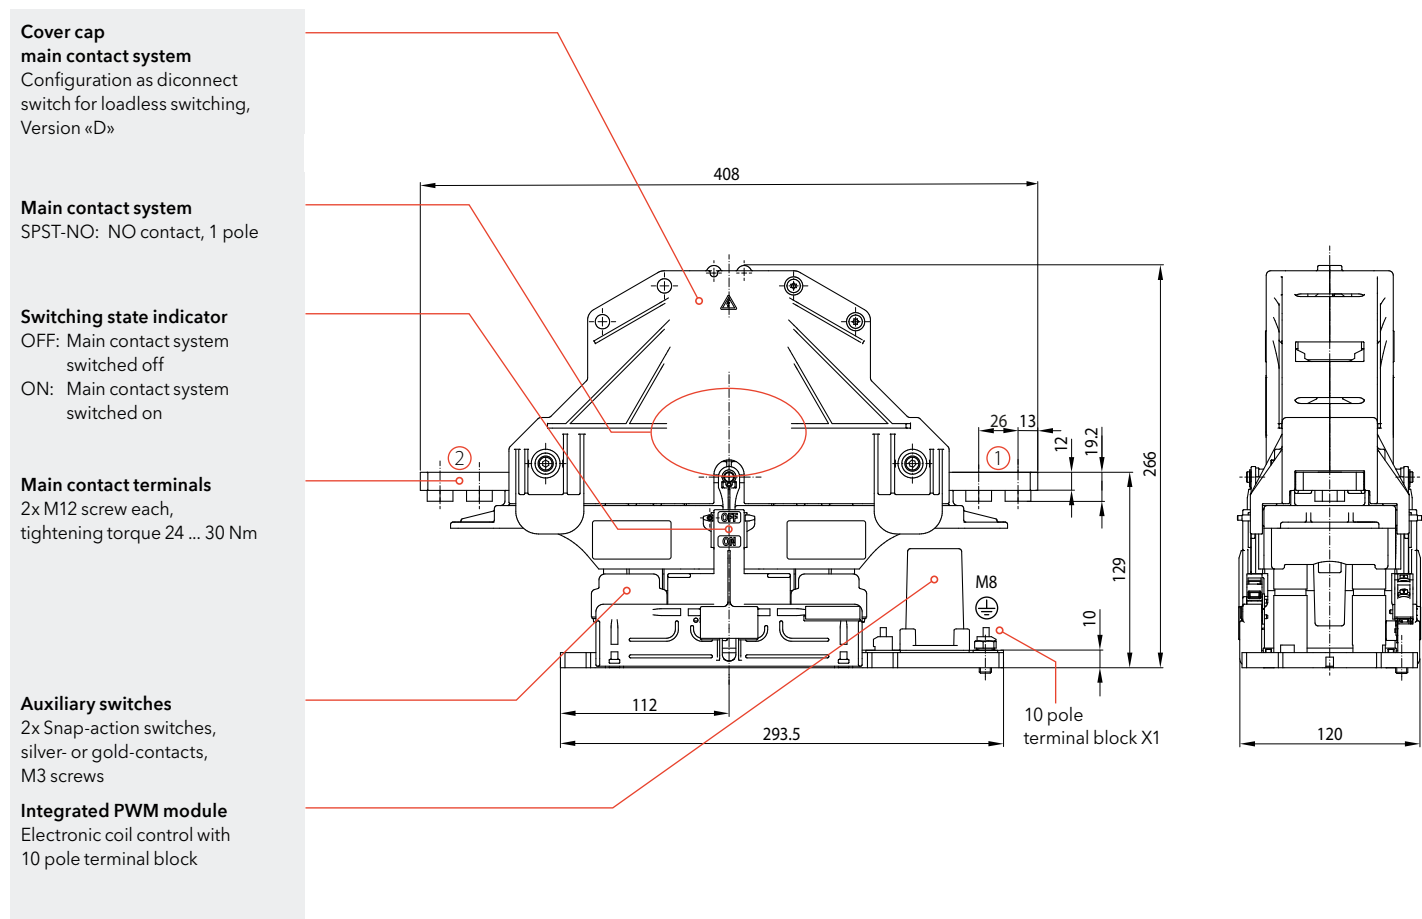


**Dimension diagram - CP1130-20-A: 1 pole SPST-NO,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 2,000\text{ A}$**   
**CP2130-20-A: 1 pole SPST-NC,  $U_n = 3,000\text{ V}$ ,  $I_{th} = 2,000\text{ A}$**

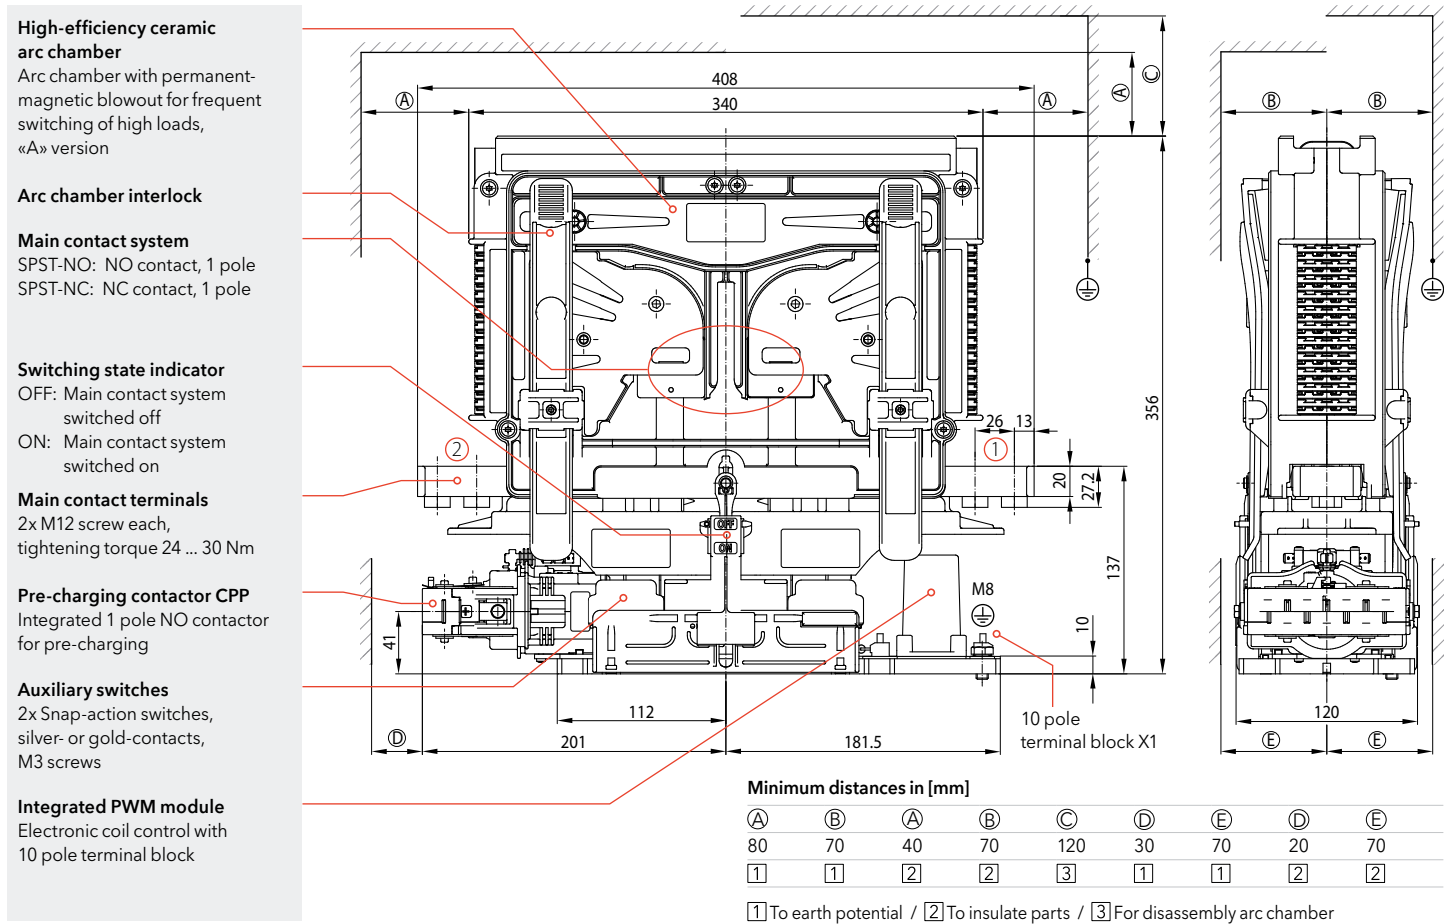

**Dimension diagram - CP1115-20-B: 1 pole SPST-NO,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 2,000\text{ A}$**   
**CP2115-20-B: 1 pole SPST-NC,  $U_n = 1,500\text{ V}$ ,  $I_{th} = 2,000\text{ A}$**

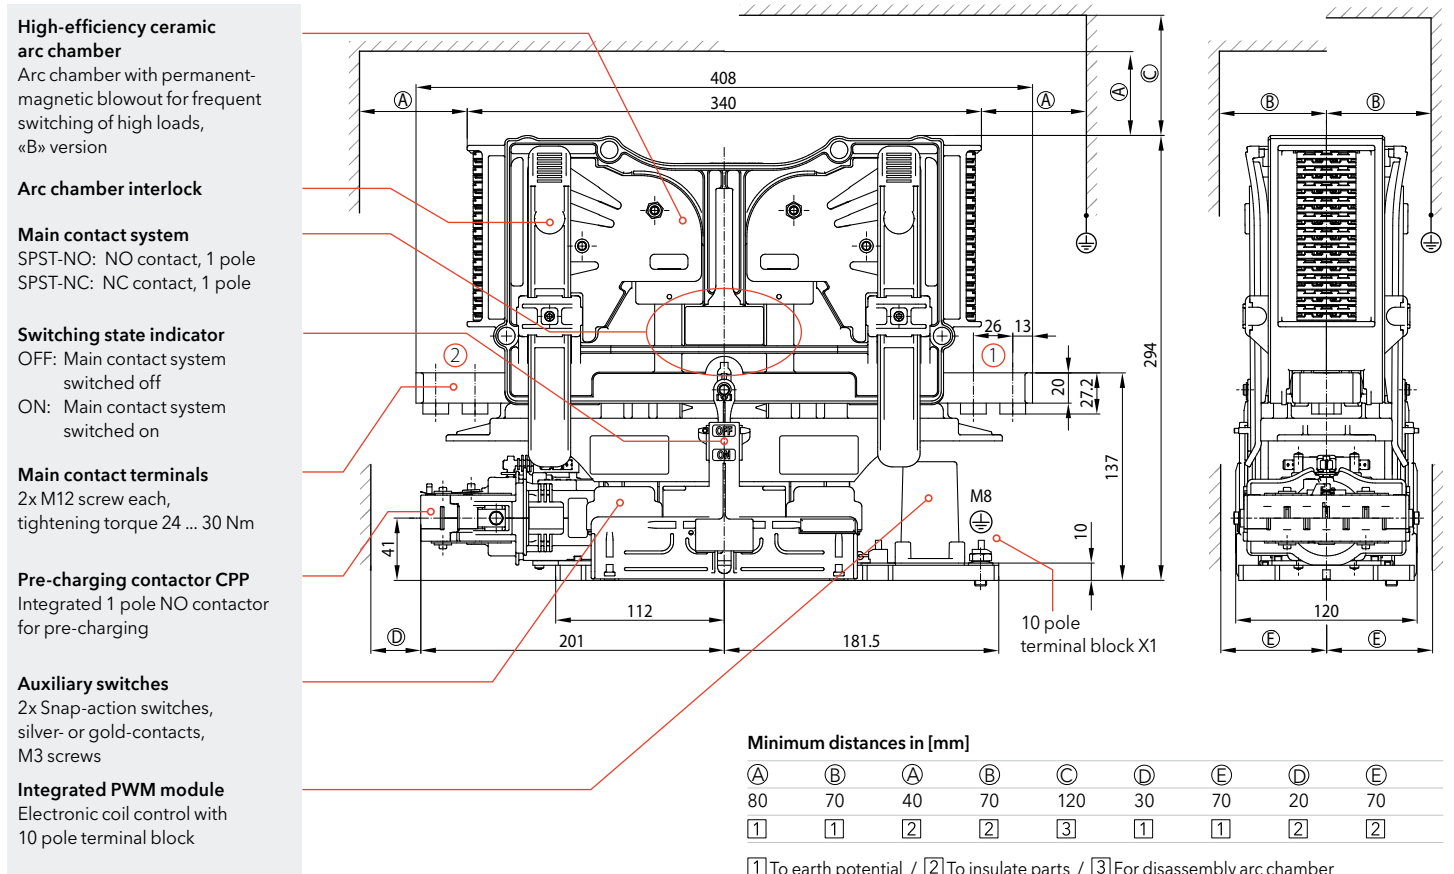

**Dimension diagram - CP1115-20-D/CP1130-20-D: 1 pole SPST-NO,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 2,000\text{ A}$   
 CP2115-20-D/CP2130-20-D: 1 pole SPST-NC,  $U_n = 1,500\text{ V}/3,000\text{ V}$ ,  $I_{th} = 2,000\text{ A}$**

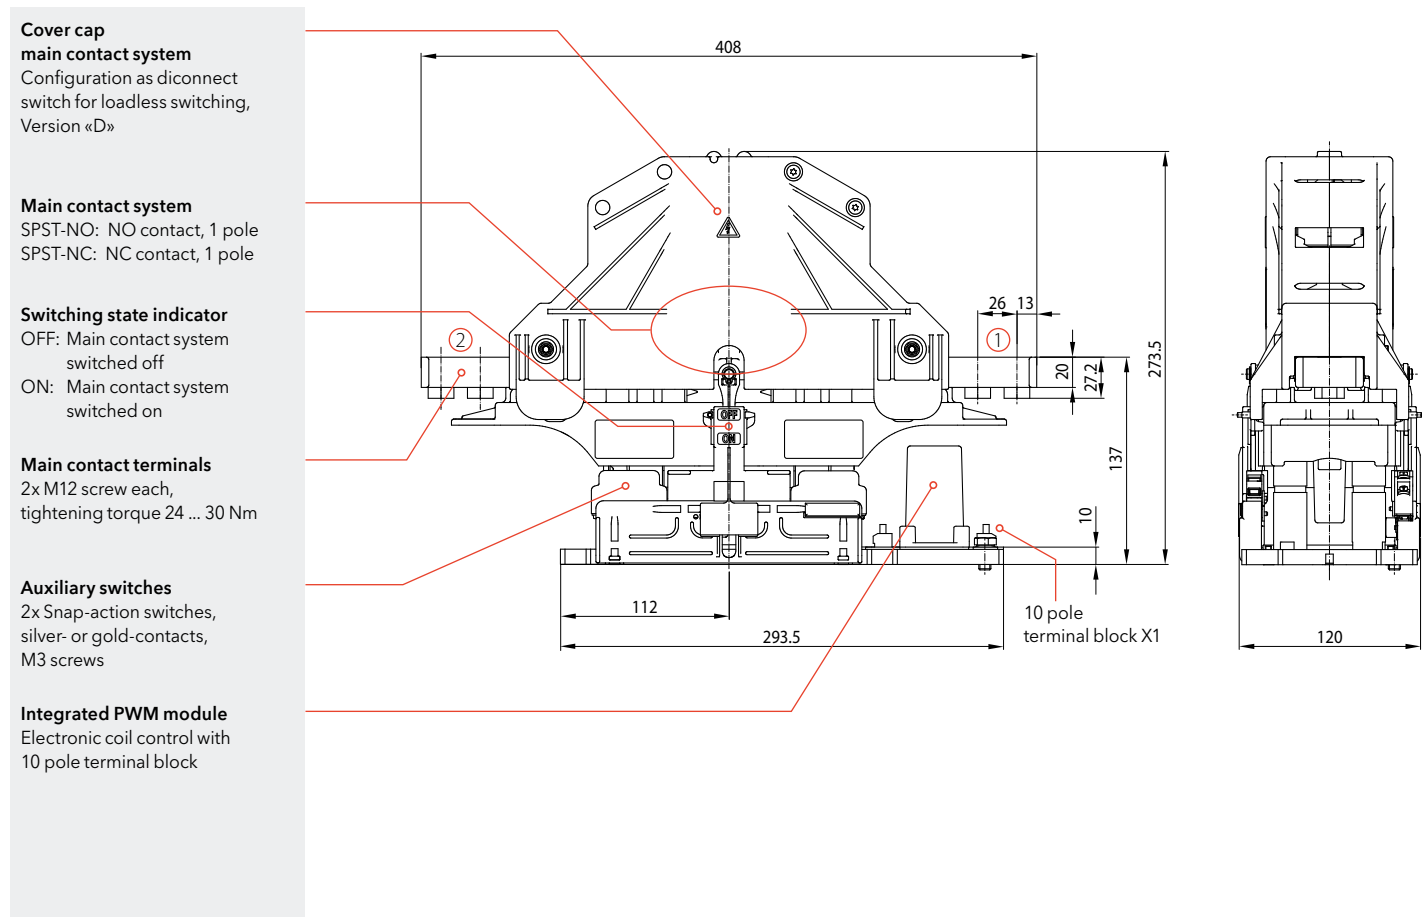


# Circuit diagram

## Magnetic drive: Coil design, terminals

## Main contacts

## Pre-charging contactor, aux. contacts, HV discharging contact\*1

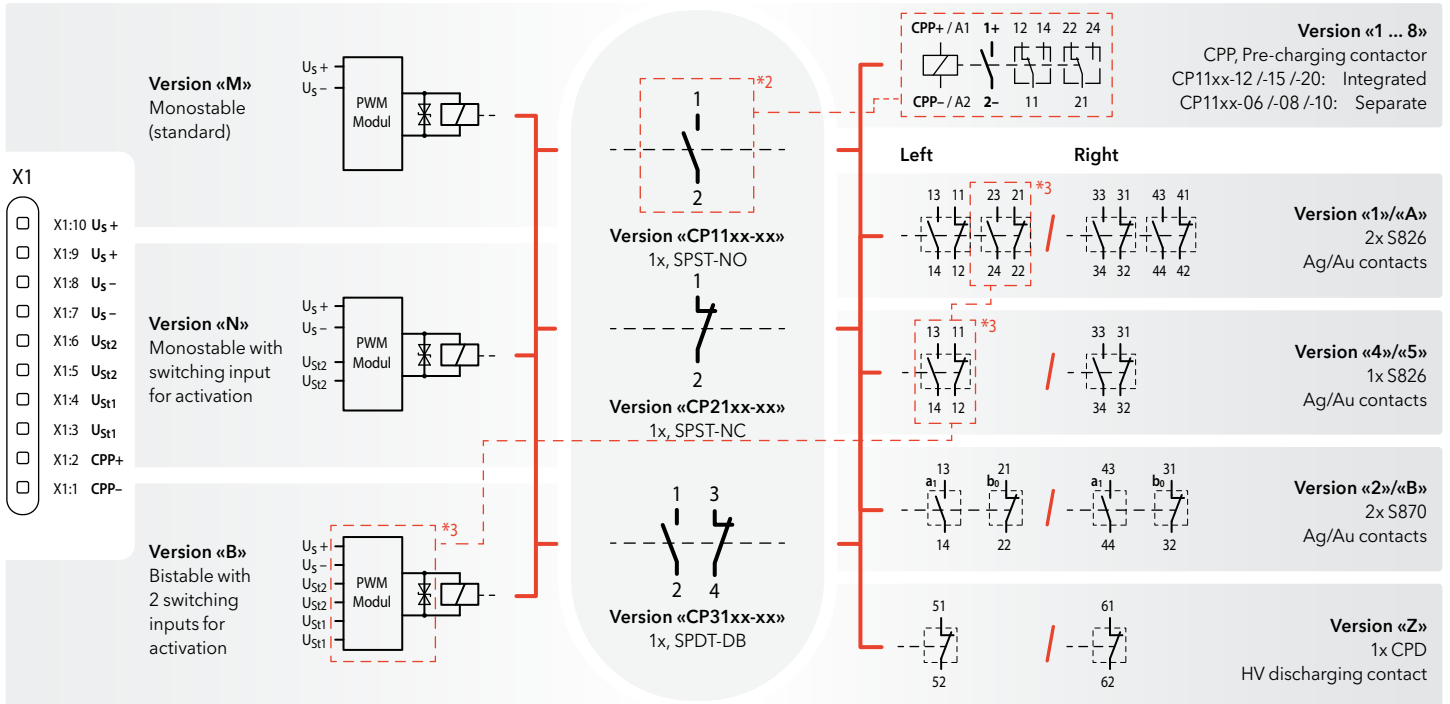

## Terminal block «X1»

10x cage clamp terminal, pin assignment depends on configuration on the configuration.

X1:10	Coil terminal U <sub>S</sub> +
X1:9	Coil terminal U <sub>S</sub> +
X1:8	Coil terminal U <sub>S</sub> -
X1:7	Coil terminal U <sub>S</sub> -
X1:6	Version «N»: Control input enable U <sub>S2</sub> +
	Version «B»: Control input close U <sub>S2</sub> +
X1:5	Version «N»: Control input enable U <sub>S2</sub> -
	Version «B»: Control input close U <sub>S2</sub> -
X1:4	Version «B»: Control input open U <sub>S1</sub> +
X1:3	Version «B»: Control input open U <sub>S1</sub> -
X1:2	Pre-charging contactor coil terminal U <sub>S</sub> + *4
X1:1	Pre-charging contactor coil terminal U <sub>S</sub> - *4

\*1 All auxiliary contacts and the high-voltage discharging contact are shown for the variants normally open and changeover contactor variants. For the NC contactor, the designations have been adapted accordingly due to the inverse control (not shown here).

\*2 Wiring of coil connections X1:1 and X1:2 only if precharging contactor integrated. The option applies to make contactors CP11xx-12, CP11xx-15 and CP11xx-20 and saves mounting effort.

The precharging contactor is included with the CP11xx-06, CP11xx-08 and CP11xx-10 NO contactors and must be mounted separately by the customer.


\*3 Wiring of switching inputs X1:3 and X1:6 only for bistable coil versions «B». An auxiliary contact S826 is additionally required for monitoring the switching state (version «1» or «5»). This auxiliary contact is not available on the customer side.

\*4 Wiring only if precharging contactor CPP integrated

**i** Coil control and auxiliary contacts can optionally be led out via a separate connector. We will also be pleased to supply customer-specific versions if the corresponding number of units is available. Please contact us!


## Permissible mounting orientations

### CPxxxx-xx-A, CPxxxx-xx-B

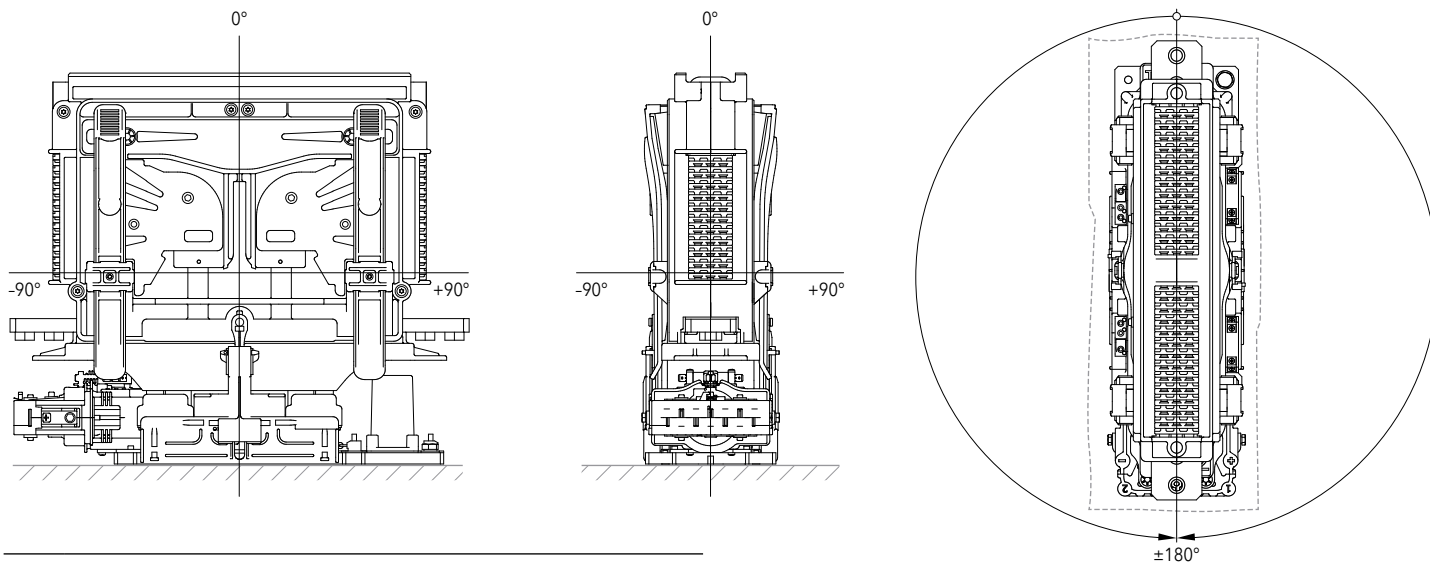

**i** The contactors can be mounted horizontally or vertically on a prepared mounting plate. Further mounting positions upon request.

### CPxxxx-xx-D

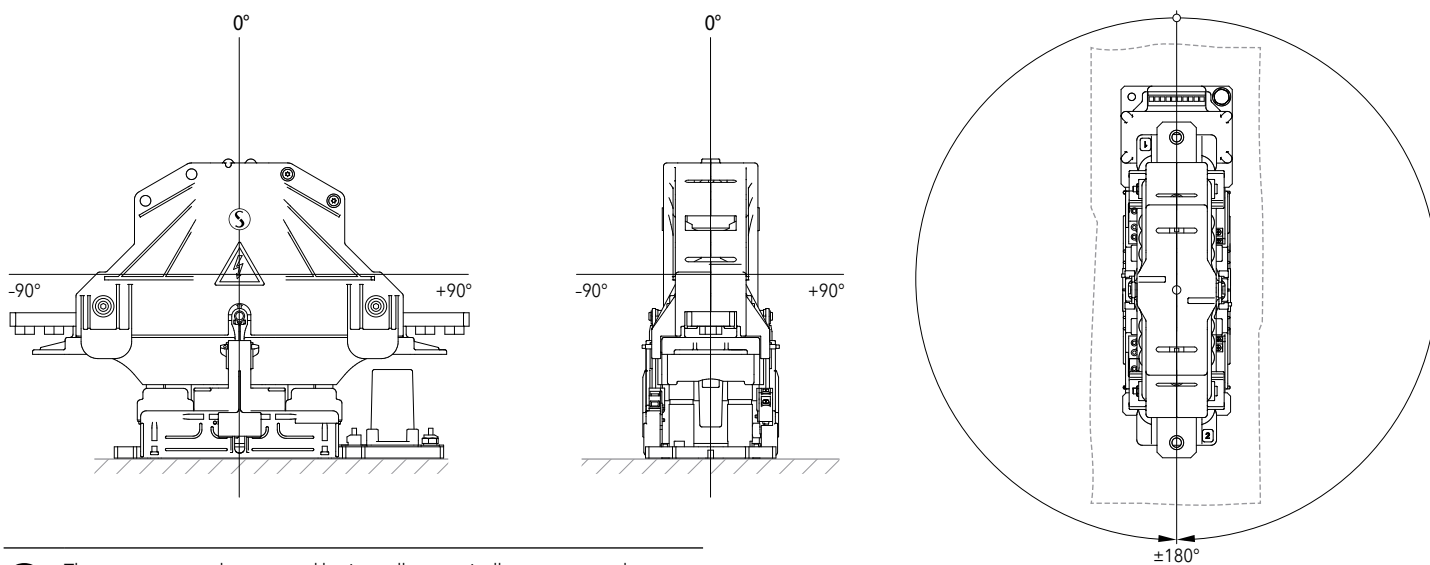


**i** The contactors can be mounted horizontally or vertically on a prepared mounting plate. Further mounting positions upon request.


## Mounting holes

The mounting holes for mounting frames or mounting plates can be either tapped holes for threaded screws or through holes for threaded screws and nuts.

**CP11xx-06, CP21xx-06, CP31xx-06 series,  
CP11xx-08, CP21xx-08, CP31xx-08 series,  
CP11xx-10, CP21xx-10, CP31xx-10 series:**

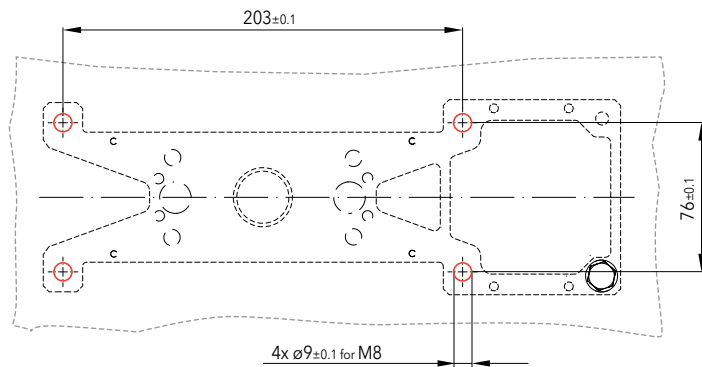

**CP11xx-12, CP21xx-12, CP31xx-12 series,  
CP11xx-15, CP21xx-15, CP31xx-15 series,  
CP11xx-20, CP21xx-20, CP31xx-20 series:**

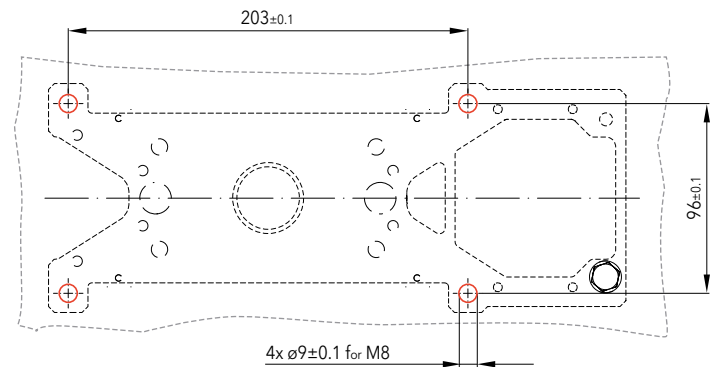

**!** Minimum clearances: The minimum distances to earth potential or to insulating parts specified in the dimension diagrams must be observed!

## Maintenance and safety instructions

### Maintenance:

- CP series contactors are basically maintenance free.
- Make regular in-depth visual inspections once or twice a year.

### Safety instructions:

- The device must be used according to the intended purpose as specified in the technical documentation. You are obliged to observe all specifications depending on operating temperature, degree of pollution etc. that are relevant to your application.
- Without further safety measures the contactors are not suited for use in potentially explosive atmospheres.
- In case of malfunction of the device or uncertainties stop using it any longer and contact the manufacturer instantly.
- Tampering with the device can seriously affect the safety of people and equipment. This is not permitted and leads to an exclusion of liability and warranty.
- Coil suppression for reducing surges when the coil is switched off is optimally attuned to the contactors switching behaviour. The existing opening characteristic must not be negatively influenced by parallel connection with an external diode.
- Contactors running permanently may heat up. So make sure that the contactor has sufficiently cooled down before you start any inspection or maintenance work.



For detailed maintenance, safety and mounting instructions please refer to our operating manuals > C40-M.en!

- When installing contactors with magnetic blowout make sure to do it in such a way that no magnetizable parts can be attracted by the permanent magnets that are also capable of destroying all data of swipe cards.
- In general, strong electromagnetic fields can be generated in the area around the contactors. These can influence other components in the area of the contactors.
- Improper handling of the contactor, e.g. when hitting the floor with some impact, can result in breakage, visible cracks and deformation.



Defective contactors or parts (e.g. arc chambers, auxiliary switches) must be replaced immediately!



For a detailed list of all safety instructions see here:  
> [schaltbau.info/safety3en!](http://schaltbau.info/safety3en!)



---

## Notes

---

A large area of the page is filled with horizontal dotted lines, providing a space for handwritten notes. The lines are evenly spaced and extend across the width of the page.

## Safety and efficiency in rail, energy, and e-mobility

Schaltbau is a global industry leader specializing in DC power and providing products and solutions that enable electrification. With a broad portfolio of contactors, connectors, switches, and safety components, Schaltbau helps partners and customers solve today's challenges in rail.

Building on this experience, with our brand Eddicy we also create future-oriented products and solutions with the highest standards of safety and reliability to switch and protect DC applications in energy and e-mobility.

Schaltbau is headquartered in Munich, Germany and represented globally, with over 1,000 employees worldwide.