

Filterless Control Cabinet Air Conditioner KG 4271-230V



Product Features

Brand Name:	SoliTherm SlimLine
Order Number:	42710001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
IP class EN 60529:	External circuit: IP 24 Internal circuit: IP 54
Optional:	Stainless steel housing, part no. 4271002
Approvals:	CE, cURus, RoHS
Accessories:	NEMA 4X cover
Taric Code:	84158200

Technical data KG 4271-230V

Cooling capacity L35L35:	820 W @ 50 Hz 885 W @ 60 Hz
Cooling capacity L35L50:	480 W @ 50 Hz 530 W @ 60 Hz
Compressor:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	280 g / 10 oz
High / low pressure:	37 / 9.6 bar 536 / 140 psig
Temperature range:	+10°C - +55°C
Air volume flow:	Ambient air circuit: 320 m³/h Cabinet air circuit: 290 m³/h
Mounting:	Internal / External
Dimension HxWxD:	980 x 395 x 145 mm
Weight:	33 kg
Cut out dimensions:	961 x 376 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	3.3 A @ 50 Hz 3.7 A @ 60 Hz
Starting current:	15.5 A
Max. current:	4.3 A
Nominal power L35L35:	660 W @ 50 Hz 760 W @ 60 Hz
Max. power:	850 W
Fuse:	10 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview product group Cabinet cooling units - SlimLine](#)


Performance Graph:

T = Ambient temperature
P = Cooling capacity

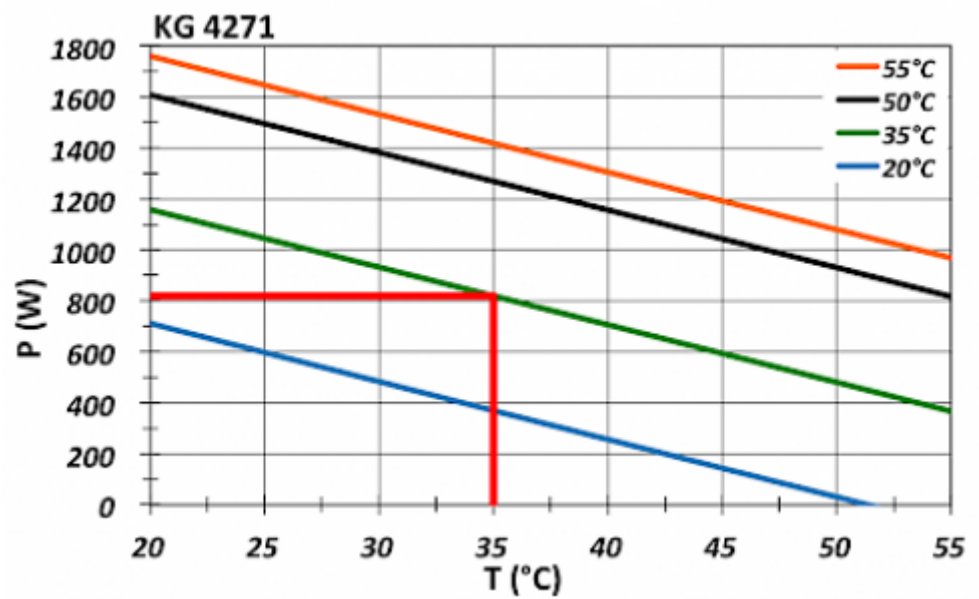


[click image to enlarge](#)

Air flow:

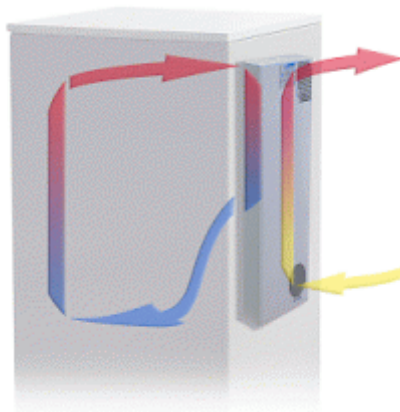

[click image to enlarge](#)

Cut out dimensions:

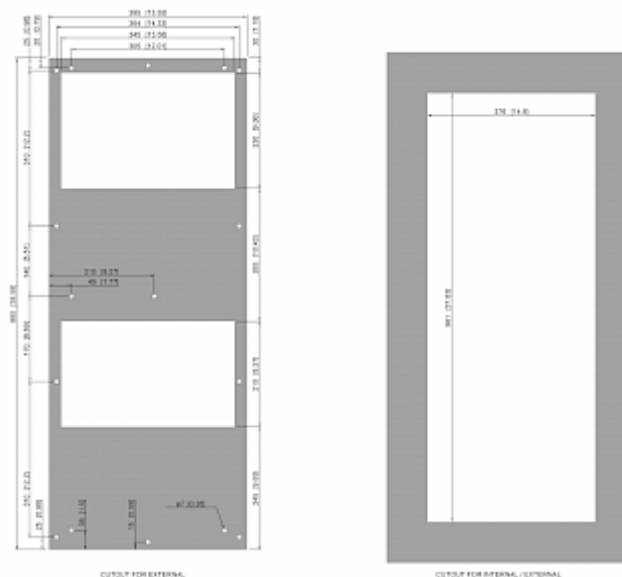

[click image to enlarge](#)