

Thermoelectric cooling unit TG 3030-12V



Product Features

Brand Name:	SoliTherm Peltier
Order Number:	3030303
Housing Material:	Stainless steel AISI 304 (V2A)
IP class EN 60529:	IP 66 NEMA 4X
Approvals:	CE, RoHS
Accessories:	☐ Condensate Kit ☐
Taric Code:	84158300

Technical data TG 3030-12V

Cooling capacity L35L35:	30 W
Temperature range:	-20°C - +65°C
Air volume flow:	Ambient air circuit: 39 m³/h Cabinet air circuit: 20 m³/h
Mounting:	Recessed
Dimension HxWxD:	110 x 154 x 128 (65) mm
Weight:	1.8 kg
Cut out dimensions:	122 x 90 mm
Voltage / Frequency:	12 V DC
Current L35L35:	2.8 A
Starting current:	4.3 A
Max. current:	2.9 A
Nominal power L35L35:	34 W
Max. power:	35 W
Fuse:	5 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview product group Cabinet cooling units - Peltier](#)


Performance Graph:

T = Ambient temperature
 P = Cooling capacity

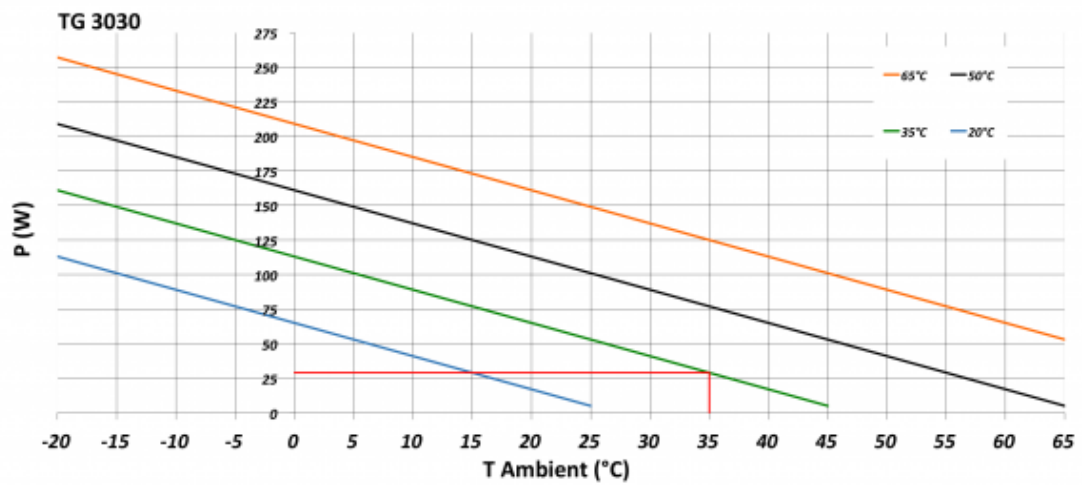


[click image to enlarge](#)

Air flow:

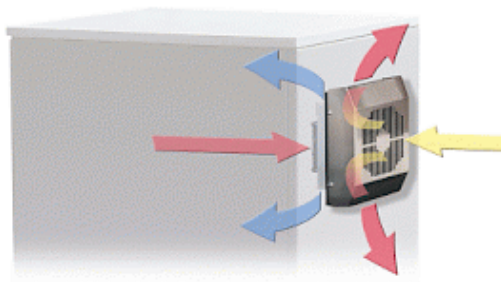

[click image to enlarge](#)

Cut out dimensions:

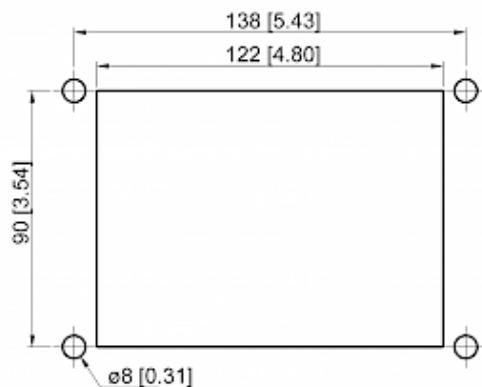

Note:
 Primary dimensions in millimeters.
 Secondary dimensions in inches.

[click image to enlarge](#)