

Thermoelectric cooling unit



Description

Order Number:	3030303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
IP protection class to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	 Condensate Kit 3030 / 3050

Technical Data


Cooling capacity L35L35 (EN14511-3):	30 W
Air flow volume (system / unimpeded):	Ambient air circuit: 39 / 75 m³/h Cabinet air circuit: 20 / 62 m³/h
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Mounting:	Recessed
Dimensions A x B x C (D+E):	110 x 154 x 132 (67+65) mm
Weight:	1.8 kg
Cut out dimensions:	122 x 90 mm
Voltage / Frequency:	12 V DC
Current L35L35:	2.8 A
Starting current:	4.3 A
Max. current:	2.9 A
Nominal power L35L35:	34 W
Max. power:	35 W
Fuse:	5 A (T)
Connection:	Connection terminal block

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLITHERM PELTIER - cooling units without refrigerant](#)

Performance graph:

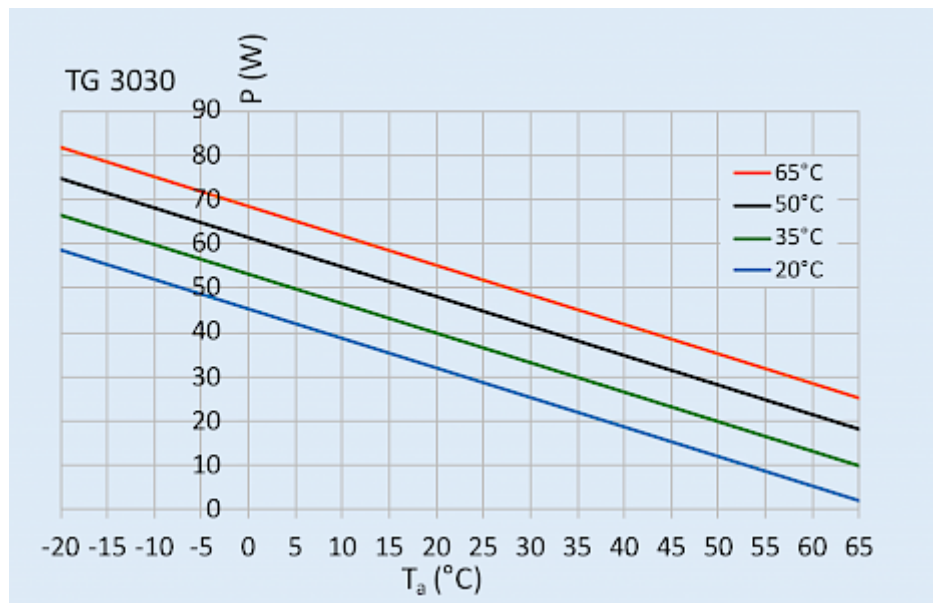

[click image to enlarge](#)

Cut Out Dimension:

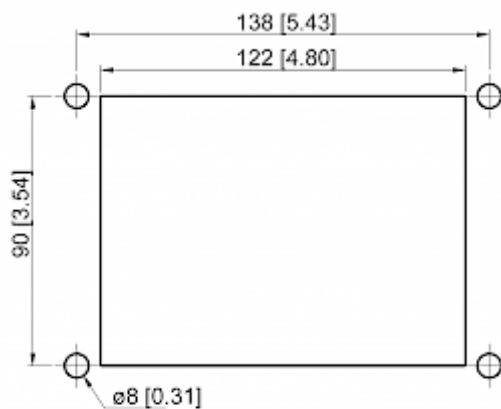

Note:

Primary dimensions in millimeters.
 Secondary dimensions in inches.

[click image to enlarge](#)

Order Information

Stainless steel AISI 316 (V4A) housing part no.	30303034
Box dimension	244 x 187 x 174 mm
Gross weight	2.0 kg
Taric code	84158300