

Outdoor Air Conditioner OC 5710-400V



Product Features

Brand Name:	SoliTherm Outdoor
Order Number:	571020001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
IP class EN 60529:	IP 56 (TYPE 12, 3, 3R, 4)
Optional:	With 400 W cabinet heater order no. 571021001
Approvals:	CE, cURus, RoHS
Taric Code:	84158200


Technical data OC 5710-400V

Cooling capacity L35L35:	1.00 kW @ 50 Hz 1.08 kW @ 60 Hz
Cooling capacity L35L50:	660 W @ 50 Hz 720 W @ 60 Hz
Compressor:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	210 g / 7.4 oz
High / low pressure:	30.5 / 6 bar 445 / 88 psig
Temperature range:	-20°C - +55°C
Air volume flow:	Ambient air circuit: 320 m ³ /h Cabinet air circuit: 375 m ³ /h
Mounting:	External
Dimension HxWxD:	900 x 304 x 270 mm
Weight:	39.5 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
Current L35L35:	2.3 A @ 400 V / 50 Hz 2.0 A @ 460 V / 50 Hz 2.4 A @ 400 V / 60 Hz 2.1 A @ 460 V / 60 Hz
Starting current:	9.2 A @ 400 V 8 A @ 460 V
Max. current:	2.9 A @ 400 V 2.7 A @ 460 V
Nominal power L35L35:	770 W @ 50 Hz 830 W @ 60 Hz
Max. power:	1155 W
Fuse:	5 A (T)
Connection:	Connection terminal block

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperature
P = Cooling capacity

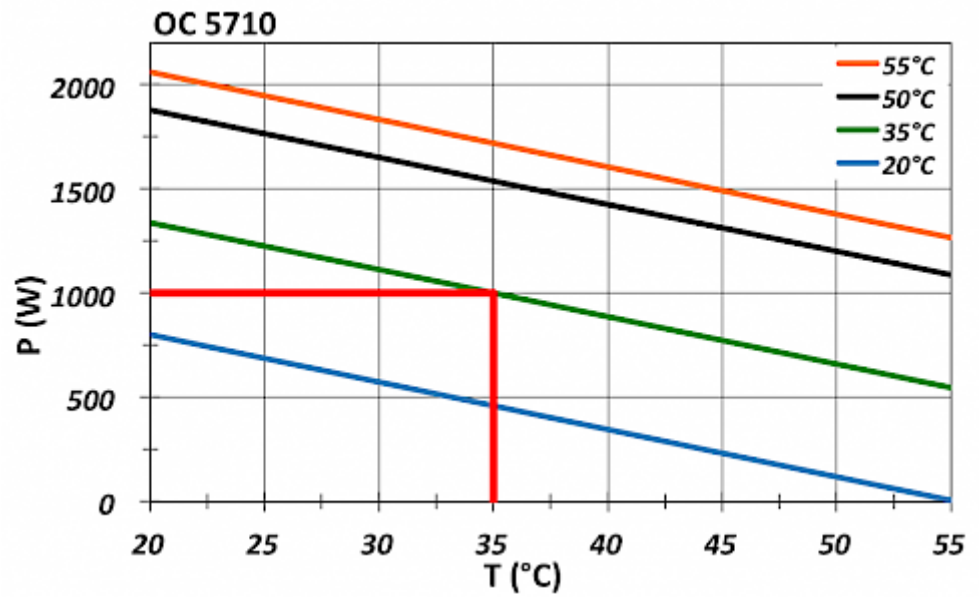

[click image to enlarge](#)

Cut out dimensions:

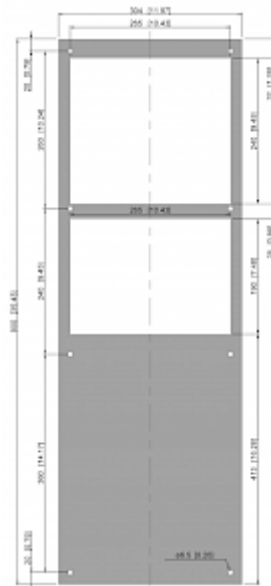

[click image to enlarge](#)