

Outdoor Air Conditioner OC 5708-230V



Product Features

Brand Name:	SoliTherm Outdoor
Order Number:	570800001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
IP class EN 60529:	IP 56 (TYPE 12, 3, 3R, 4)
Optional:	With 400 W cabinet heater order no. 570801001
Approvals:	CE, cURus, RoHS
Taric Code:	84158200

Technical data OC 5708-230V

Cooling capacity L35L35:	750 W @ 50 Hz 830 W @ 60 Hz
Cooling capacity L35L50:	650 W @ 50 Hz 695 W @ 60 Hz
Compressor:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	234 g / 8 oz
High / low pressure:	25 / 6 bar 362 / 88 psig
Temperature range:	-20°C - +55°C
Air volume flow:	Ambient air circuit: 315 m³/h Cabinet air circuit: 165 m³/h
Mounting:	External
Dimension HxWxD:	830 x 304 x 270 mm
Weight:	30 kg
Cut out dimensions:	265 x 180 265 x 160 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	3.2 A
Starting current:	11 A
Max. current:	3.7 A
Nominal power L35L35:	560 W
Max. power:	735 W
Fuse:	6 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperature
P = Cooling capacity

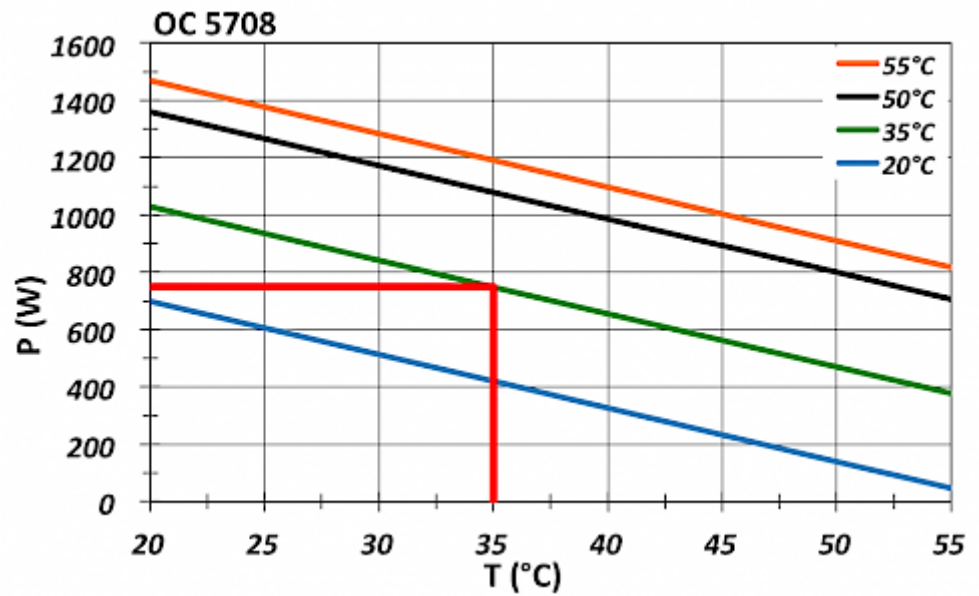

[click image to enlarge](#)

Cut out dimensions:

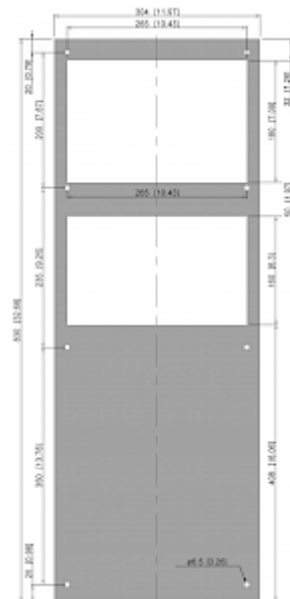

[click image to enlarge](#)