

Outdoor Air Conditioner OC 5741-400V



Product Features

Brand Name:	SoliTherm Outdoor
Order Number:	574120001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
IP class EN 60529:	IP 56 (TYPE 12, 3, 3R, 4)
Optional:	With 2,000 W cabinet heater order no. 574121001
Approvals:	CE, RoHS
Taric Code:	84158200

Technical data OC 5741-400V

Cooling capacity L35L35:	4000 W @ 50 Hz 4100 W @ 60 Hz
Cooling capacity L35L50:	3250 W @ 50 Hz 3400 W @ 60 Hz
Compressor:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	1000 g / 35 oz
High / low pressure:	27.7 / 6 bar 406 / 88 psig
Temperature range:	-20°C - +55°C
Air volume flow:	Ambient air circuit: 990 m³/h Cabinet air circuit: 950 m³/h
Mounting:	External
Dimension HxWxD:	1,550 x 457 x 355 mm
Weight:	83 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 3~
Current L35L35:	3.8 A
Starting current:	8.2 A / 8.5 A
Max. current:	5.0 A
Nominal power L35L35:	1910 W
Max. power:	3300 W
Fuse:	3 x 8 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview product group Cooling units - Outdoor](#)


Performance Graph:

T = Ambient temperature
P = Cooling capacity

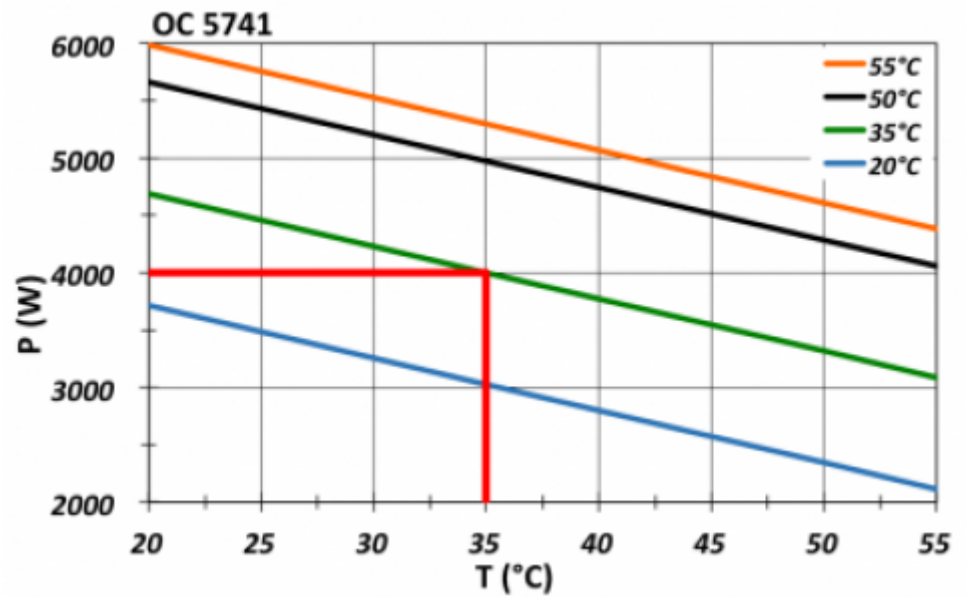

[click image to enlarge](#)

Cut out dimensions:

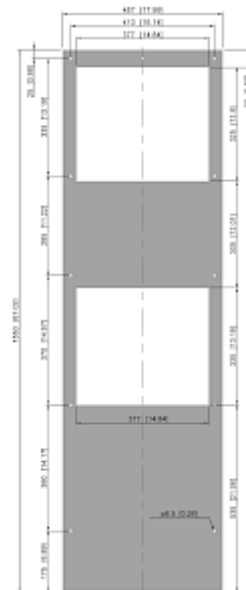

[click image to enlarge](#)